


MBR3060CT

/ Absolute Maximum Ratings(Ta=25)




/ Electrical Characteristic Curve

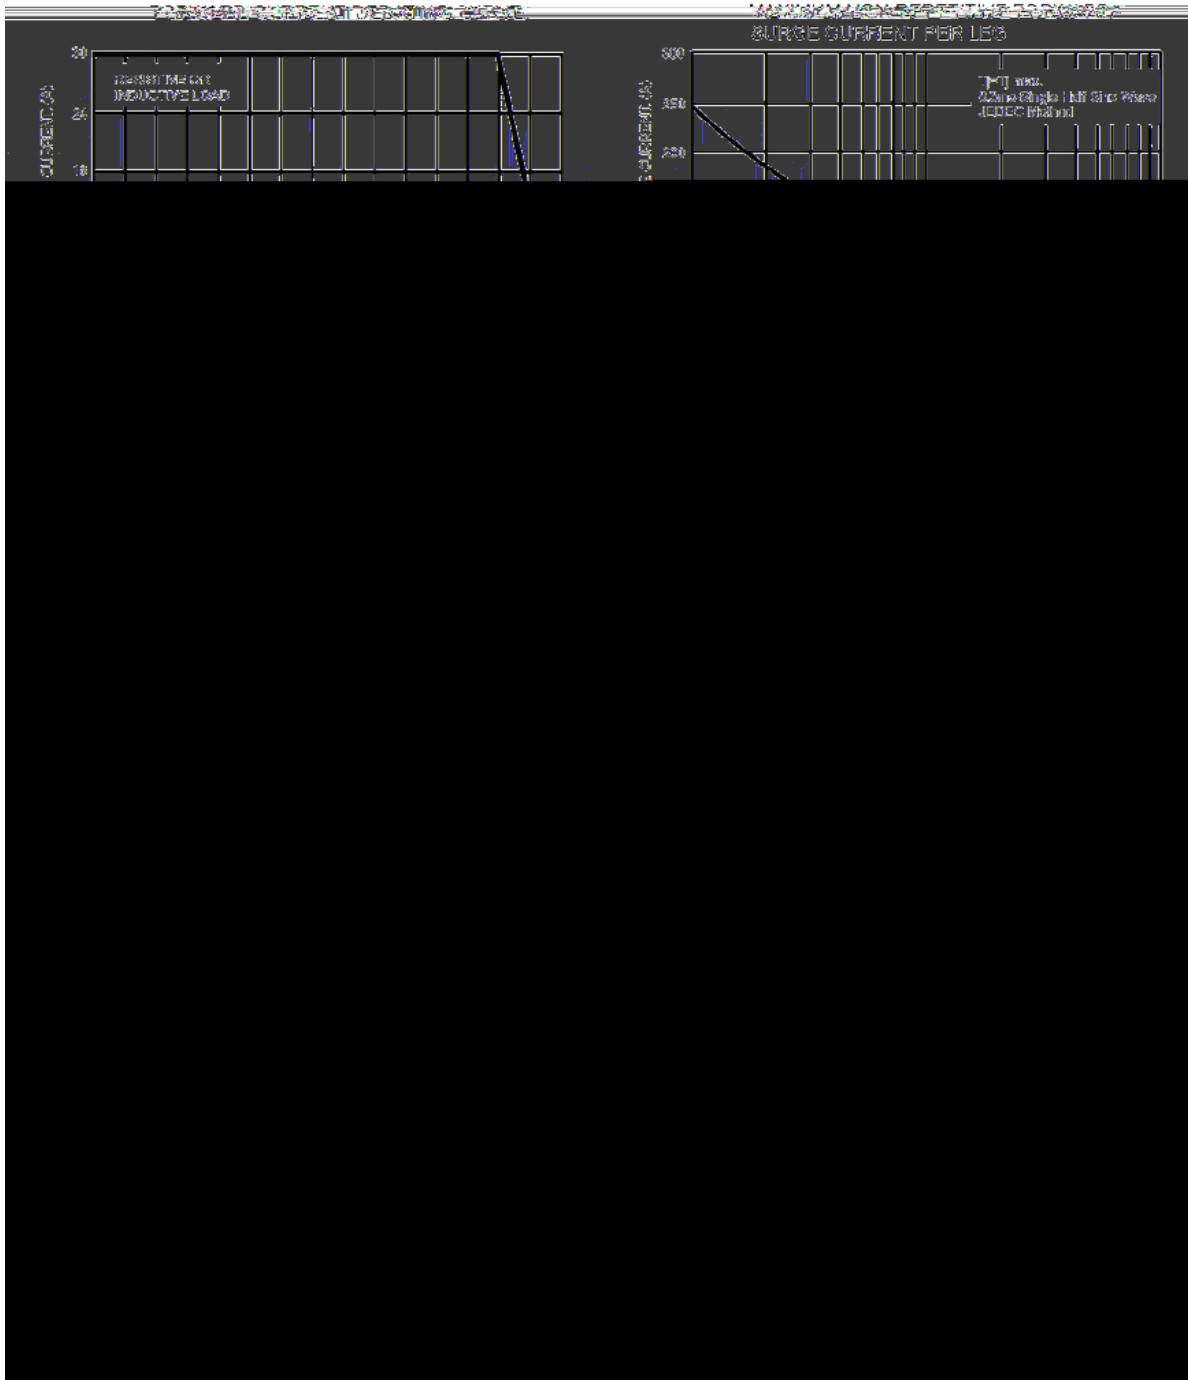

/ Package Dimensions


单位: mm

TO-220

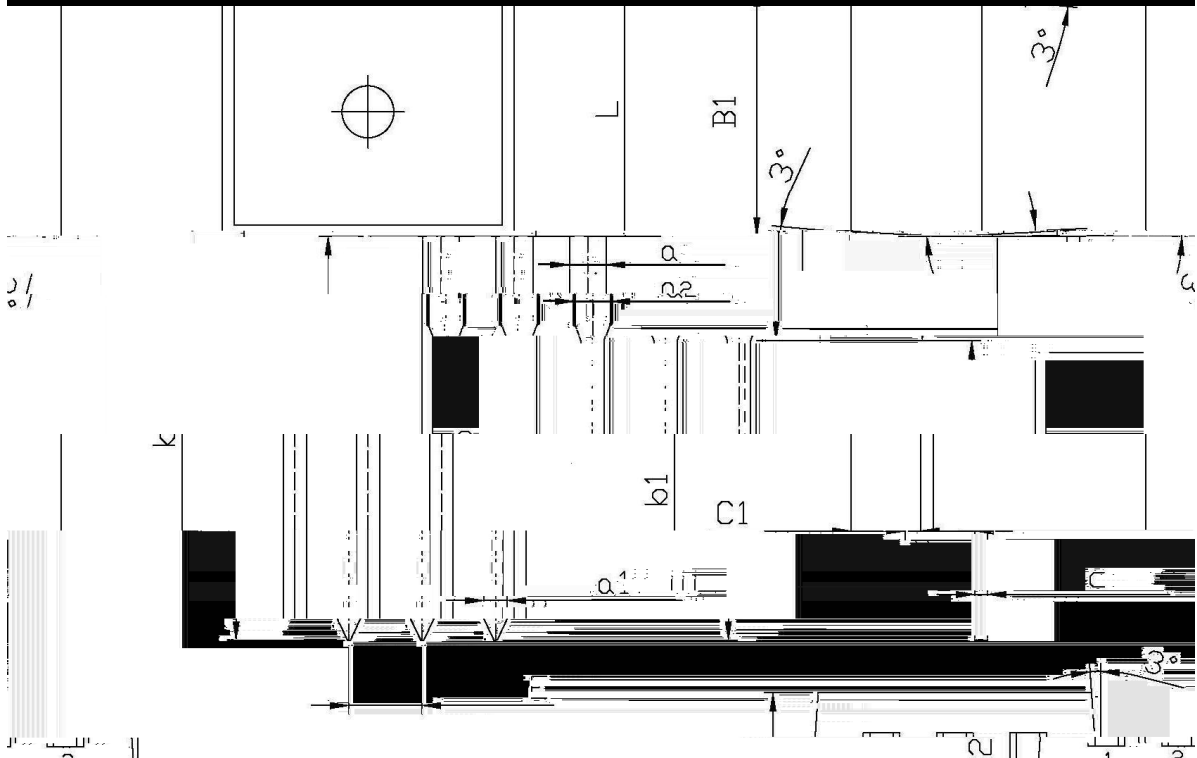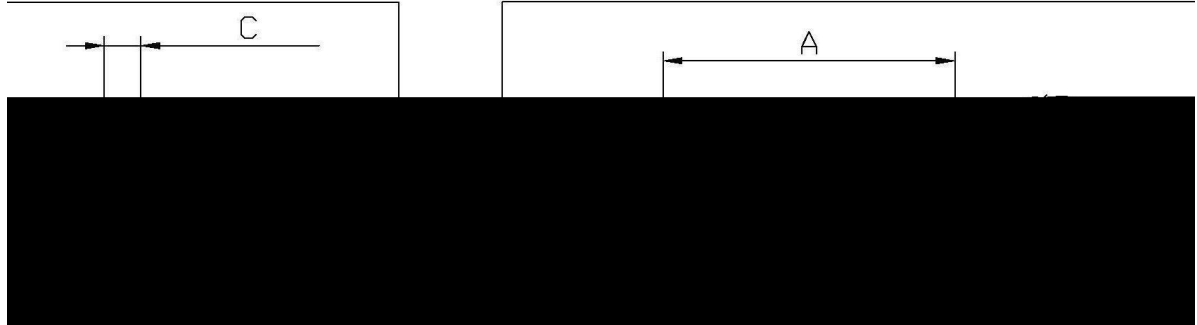

Symbol	Dimensions in milimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
A	9.8	10.2	C	12.5	14.5
R	3.56	3.64	B	6.3	6.7
L	9.0	9.4	L	15.7	16.1
B1	12.2	12.6	a	1.25	1.32
a1	0.7	0.9	b1	9.5	10.6
C	0.4	0.6	a	1.22	1.32
k	1.9	1.7	1	0.2	0.145

/ Marking Instructions

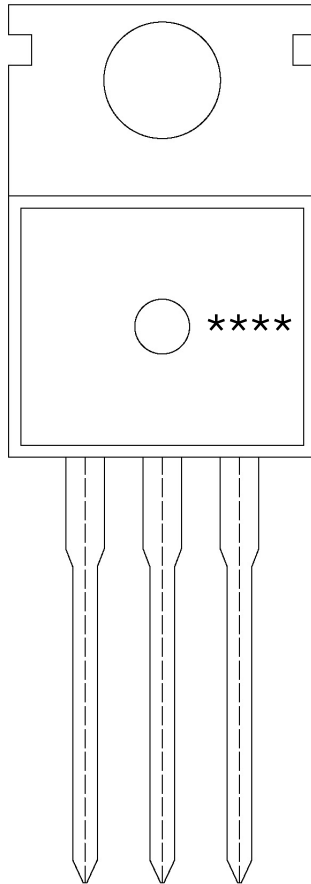


BR

MBR3060

CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

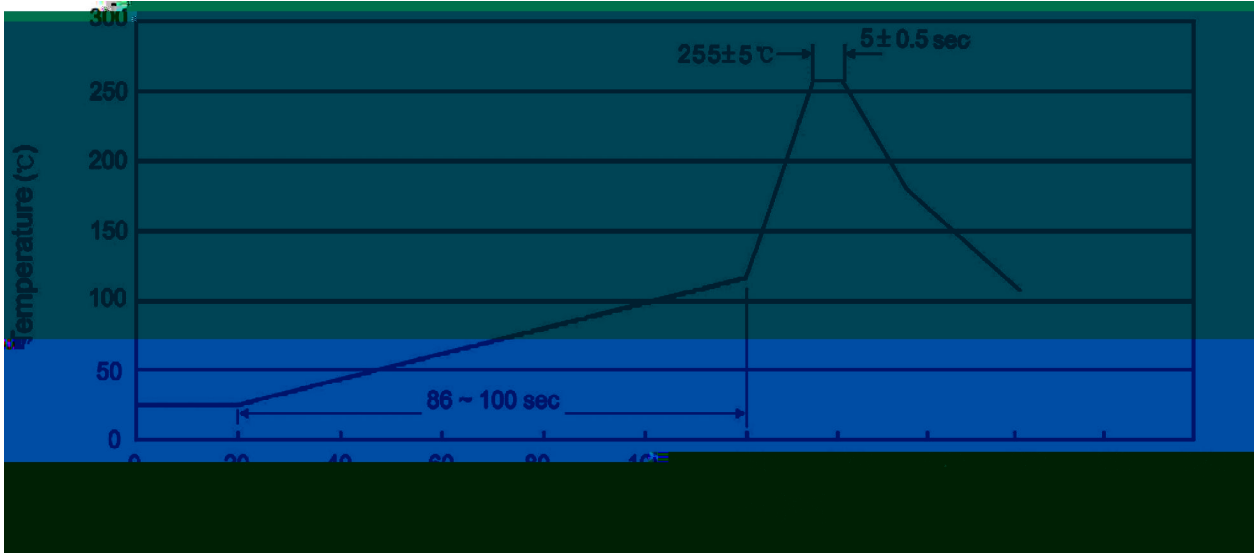

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices