


/ Descriptions

TO-252


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking





/ Absolute Maximum Ratings(Ta=25)

	()		
			°C
			°C
		~	°C


/ Electrical Characteristics(Ta=25)

		°C				
		°C				
		°C				
		°C				
		°C				
		°C				
						μ


/ Electrical Characteristic Curve

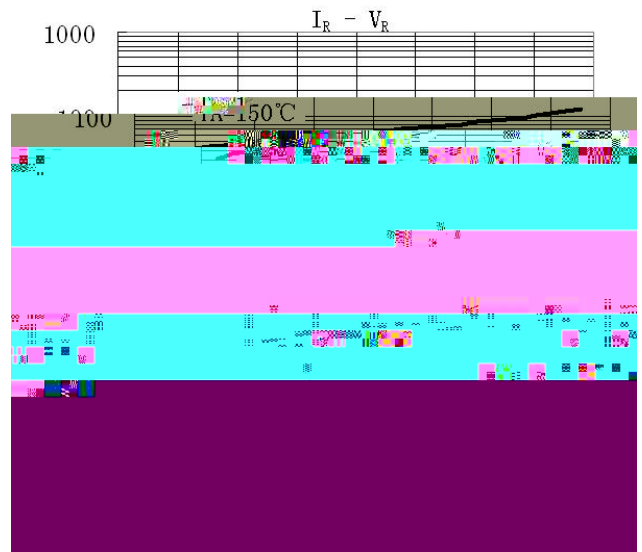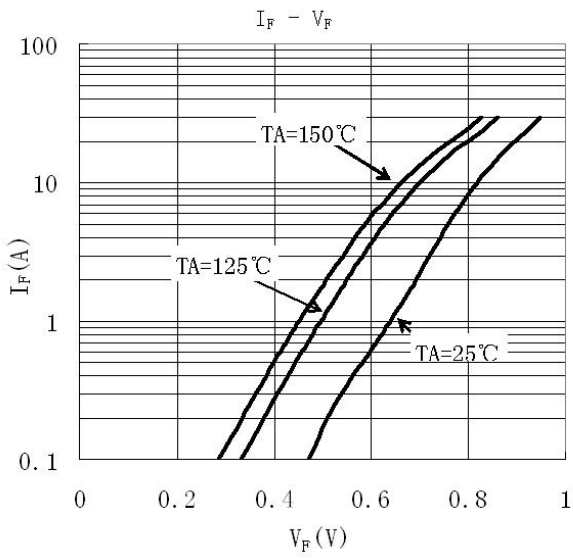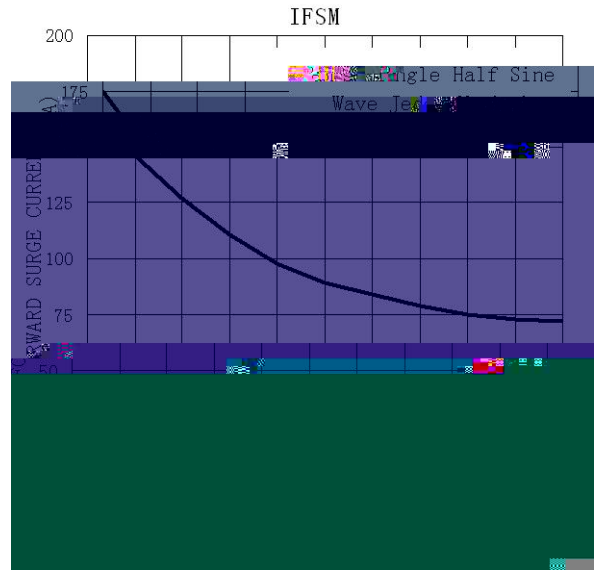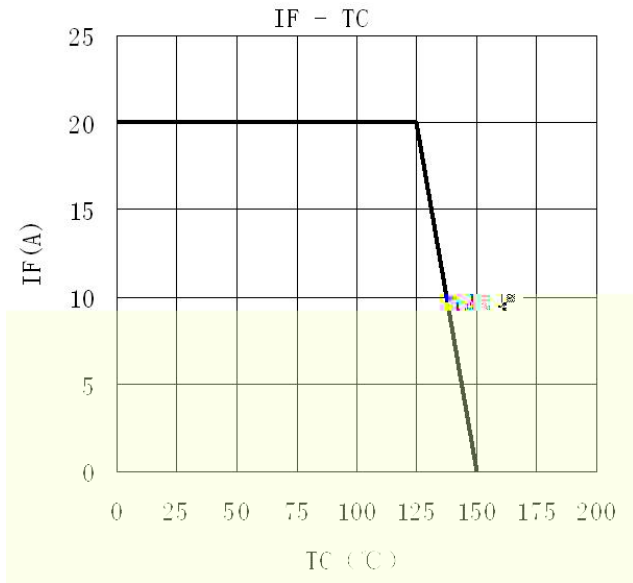

/ Package Dimensions

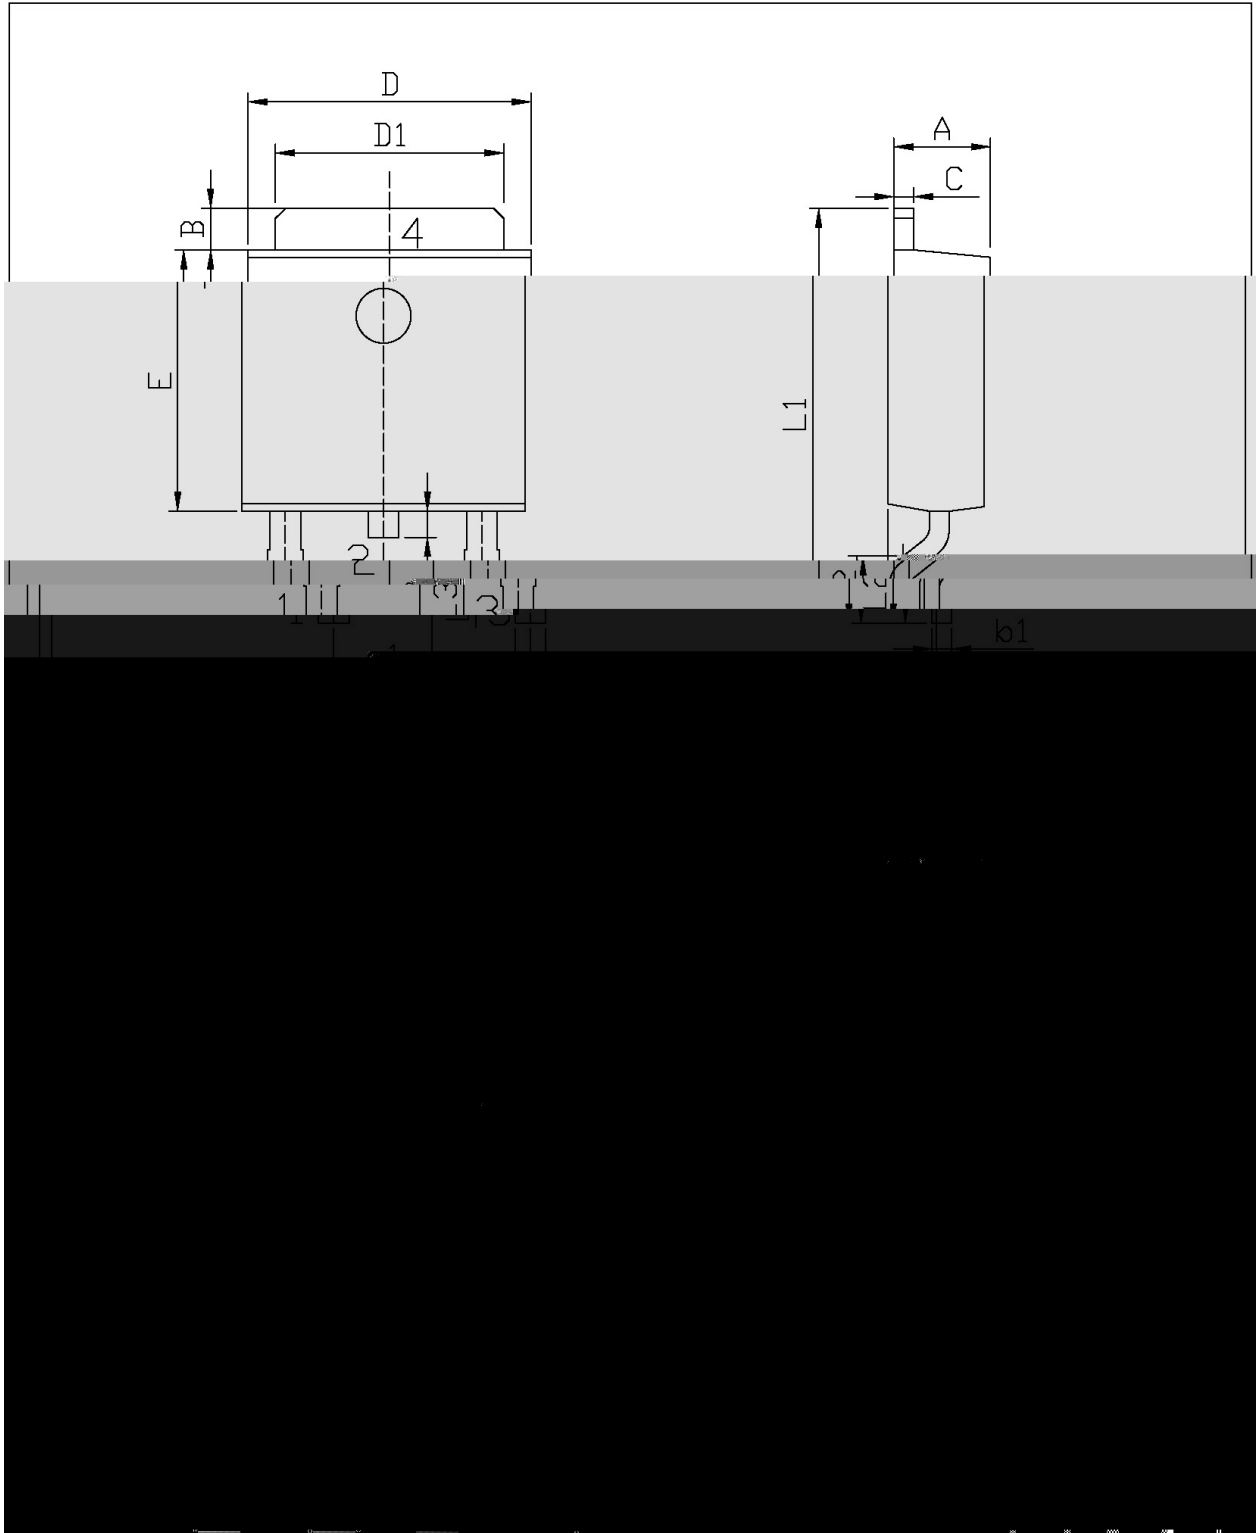

/ Marking Instructions

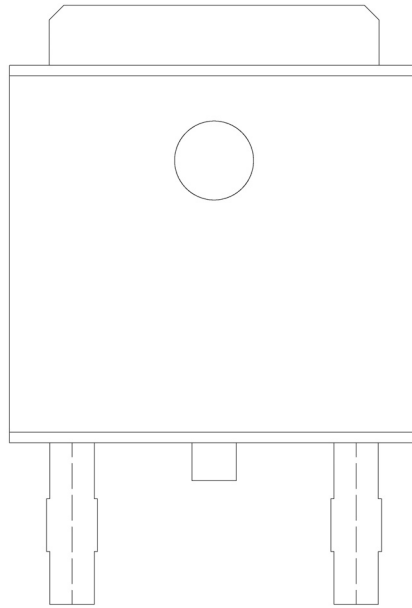


BR

MBRD20150

CT:

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

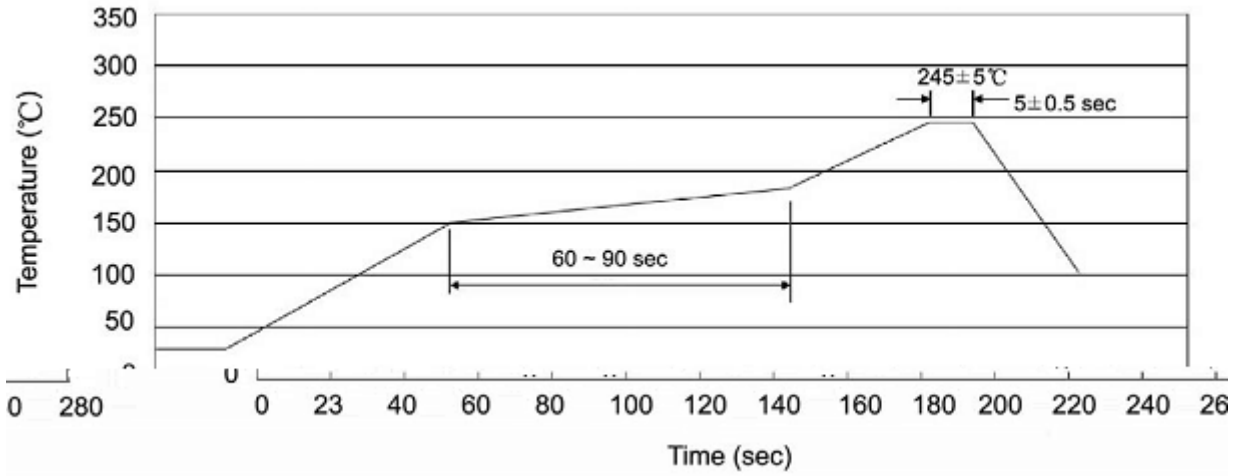

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

/ Notices