

MBRE560

/ Absolute Maximum Ratings(Ta=25)





| | | | |
|--|---|--|----|
| | | | |
| | | | |
| | | | |
| | | | |
| | | | |
| | | | °C |
| | | | °C |
| | θ | | °C |

/ Electrical Characteristics(Ta=25)


| | | | | | | |
|--|--|----|--|--|--|--|
| | | | | | | |
| | | | | | | |
| | | °C | | | | |
| | | °C | | | | |
| | | °C | | | | |
| | | °C | | | | |
| | | °C | | | | |
| | | °C | | | | |
| | | °C | | | | |

- /
- 1. FR-4 PCB 2
- 2. /

/ Electrical Characteristic Curve

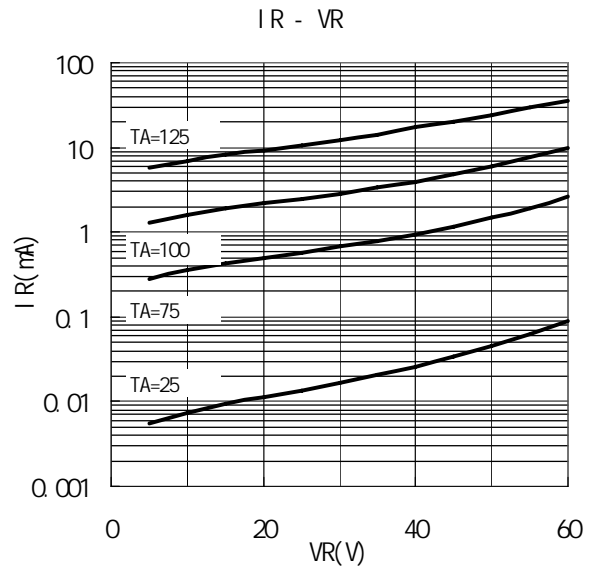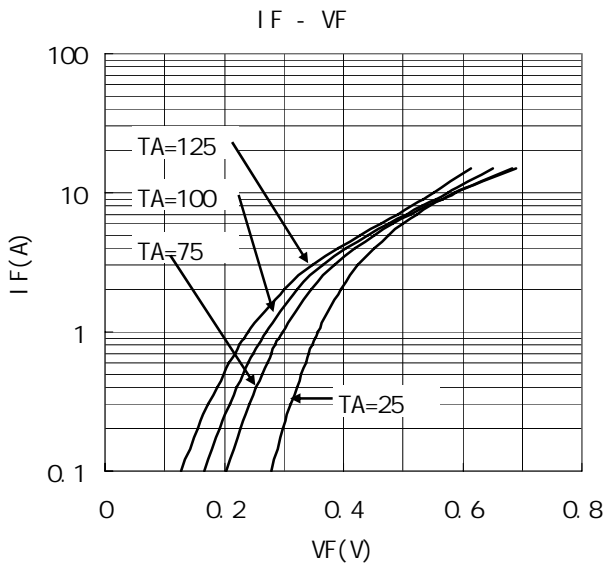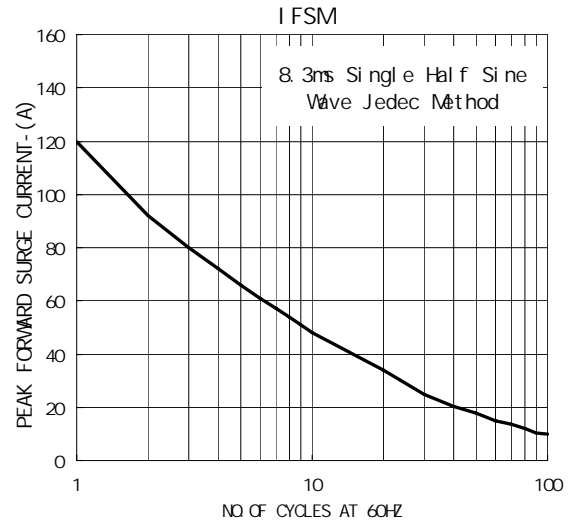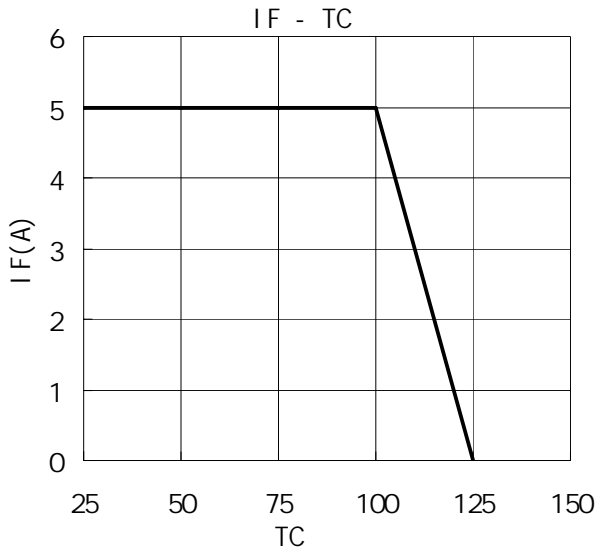


/ Package Dimensions

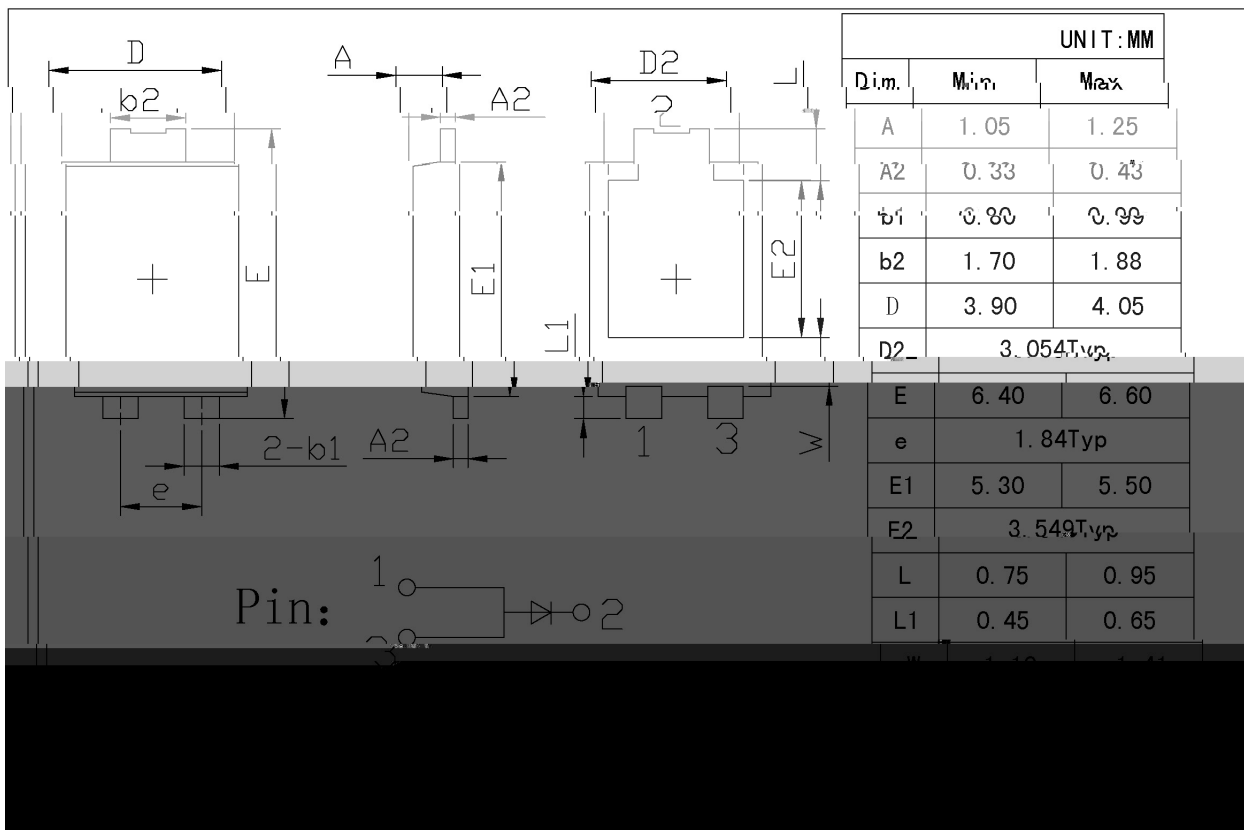

MBRE560

() /



± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

| 封装形式 | 包装数量 | | | | | 包装尺寸 : | | |
|--------|--------------------|-------------------------|------------------------|------------------------------|------------------------|--------|-------------|-------------|
| | Units/Reel 只/卷盘 | Reels/Inner Box 卷盘/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Reel | Inner Box 盒 | Outer Box 箱 |
| TO-277 | 5,000 | 3 | 15,000 | 6 | 90,000 | 13 ×12 | 360×360×50 | 380×335×366 |

/ Notices