

Rev.FApr.-2017

SOT-23 NPN Silicon NPN transistor in a SOT-23 Plastic Package.

Low noise, high gain.


High frequency amplifier applications.



PIN 1 Base PIN 2 Emitter PIN 3 Collector


h_{FE} Range	30 300
Marking	HR2P


Rev.FApr.-2017

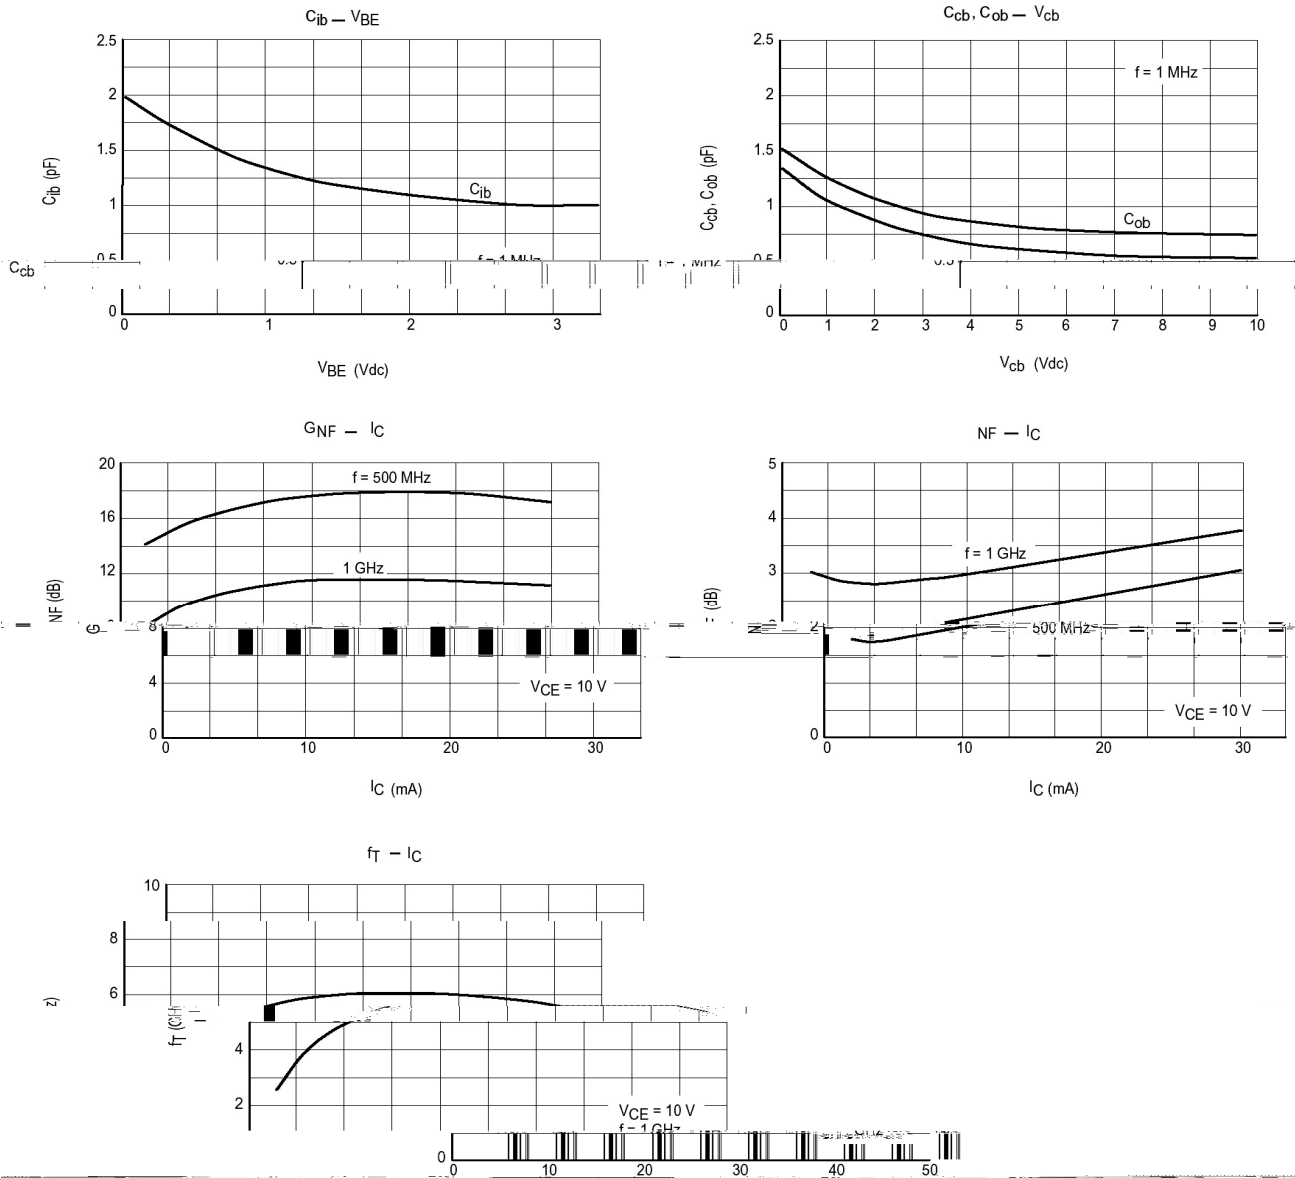

SOT-23

单位: mm

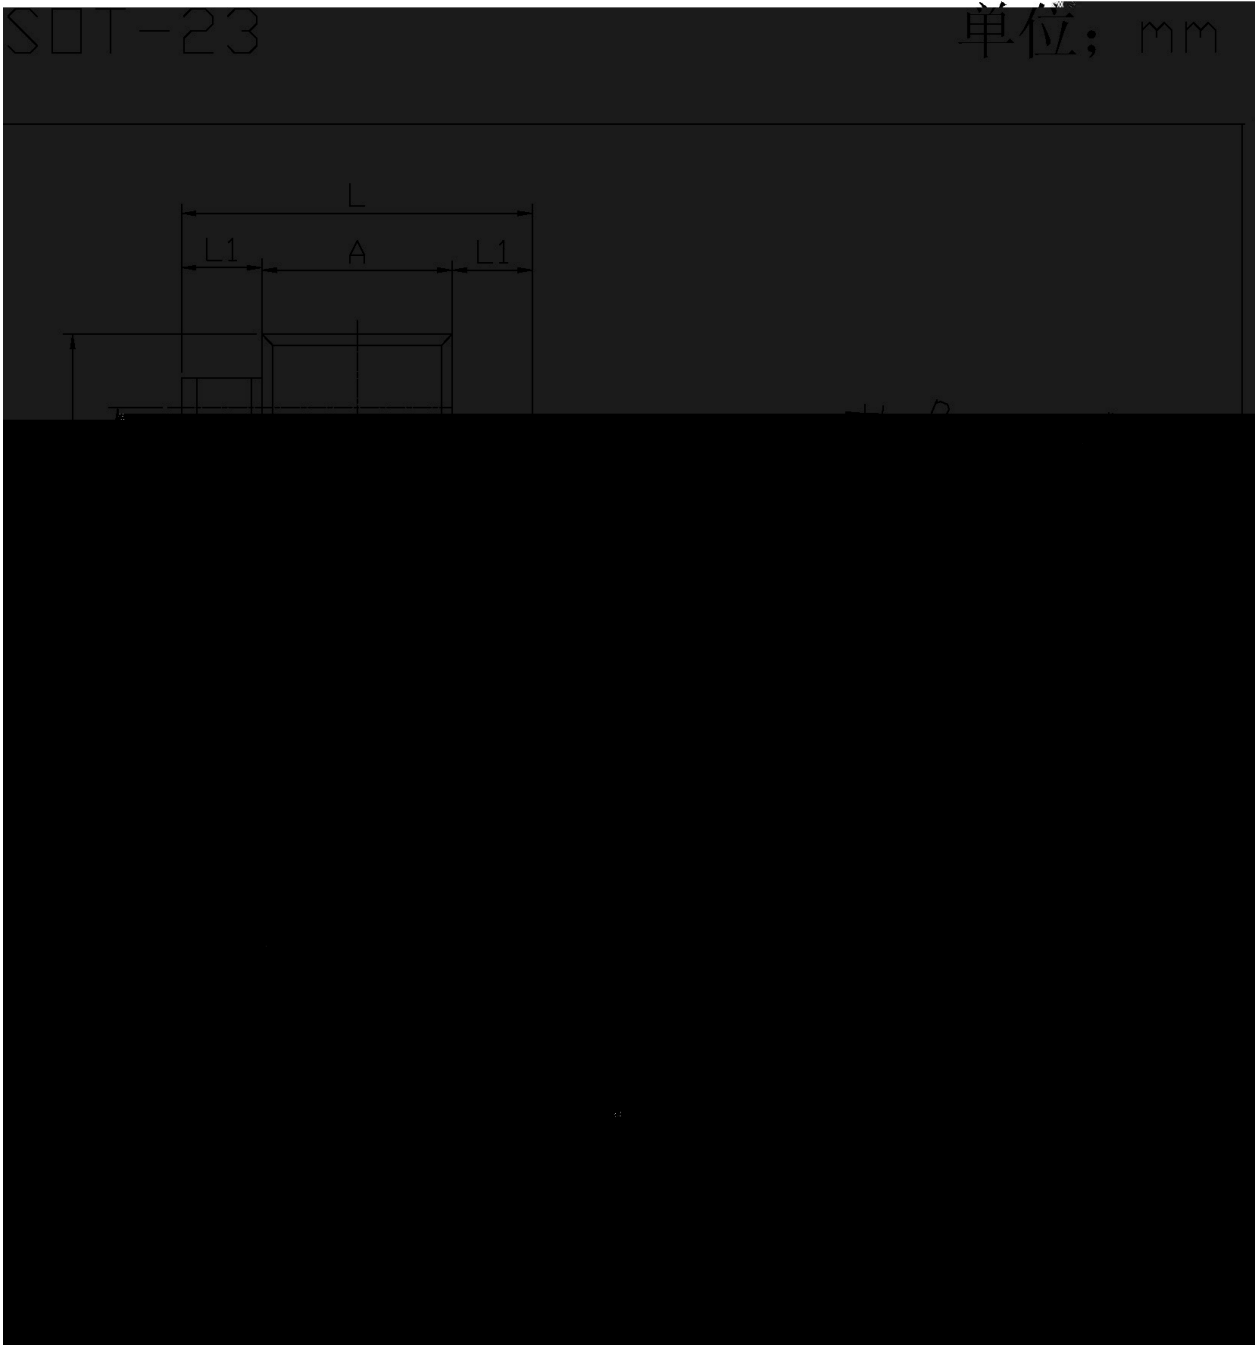

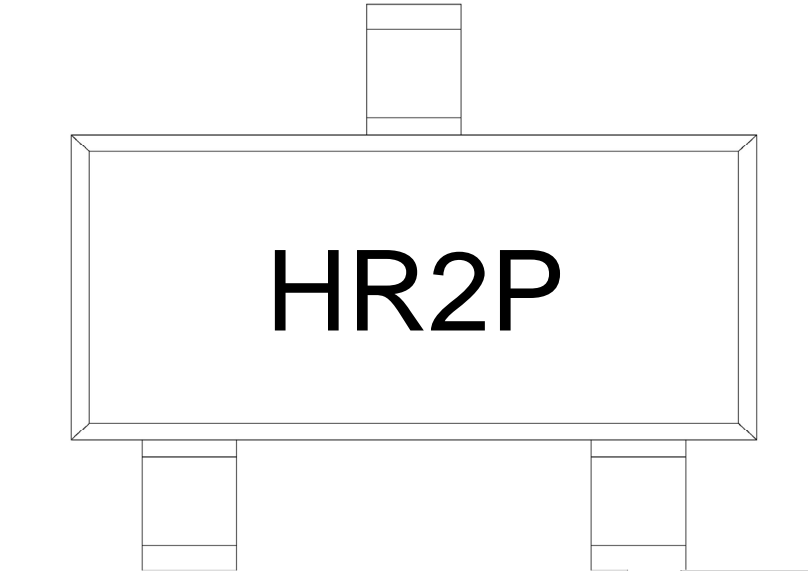


H

R2P

Note:

H Company Code

R2P Product Type

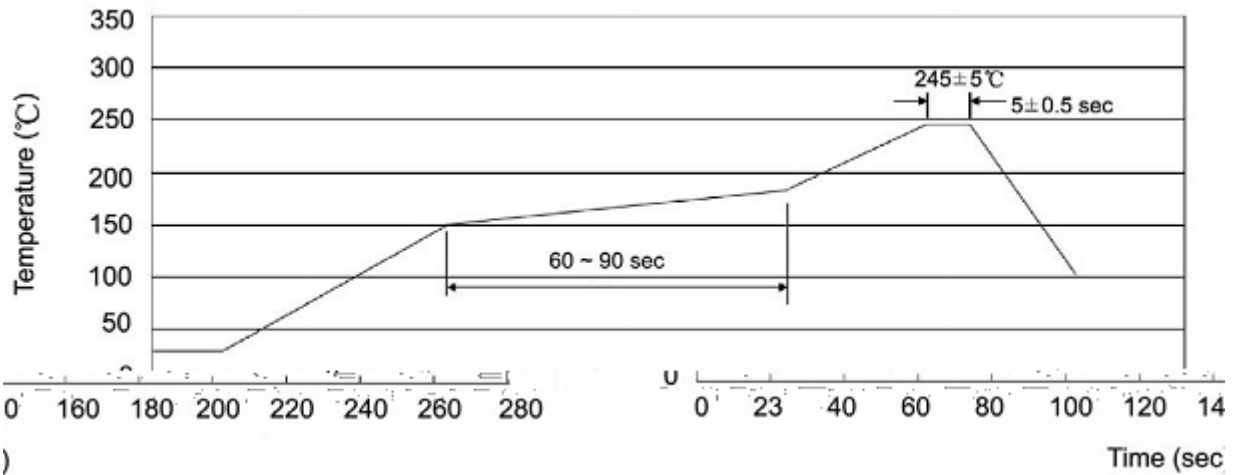

Note:

- | | | | |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 °C, Time:60~90sec. |
| 2 | 245±5 | 5±0.5sec; | 2.Peak Temp.:245±5 °C, Duration:5±0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 °C/sec. |

 260 ± 5
 $10 \pm 1 \text{ sec.}$

 Temp.: $260 \pm 5^\circ\text{C}$

 Time: $10 \pm 1 \text{ sec}$

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只卷盘	卷盘盒	只盒	盒箱	只箱	盒		箱