

/ Descriptions



Silicon NPN transistor in a SOT-23 Plastic Package.

/ Features

Complementary to MMBTA56.

/ Applications

Ideal for medium power amplification and switching.








/ Equivalent Circuit**/ Pinning**

PIN1 Base PIN 2 Emitter PIN 3 Collector

/ Marking

h_{FE} Range	100~300
Marking	HK1G


/ Electrical Characteristic Curve

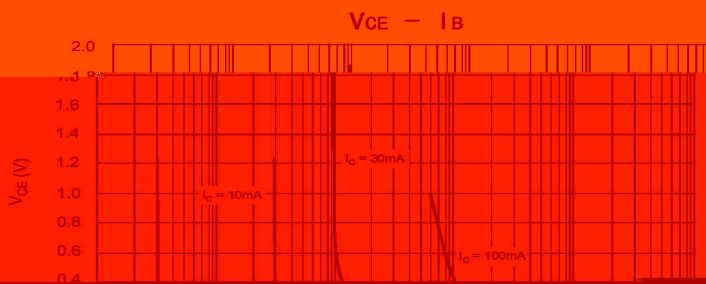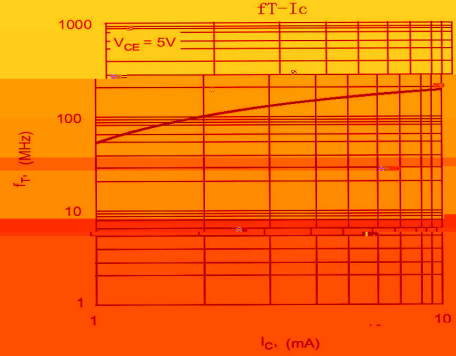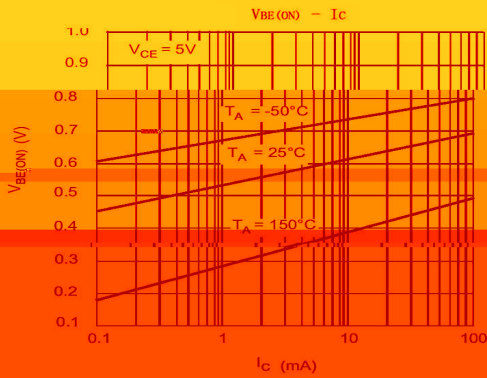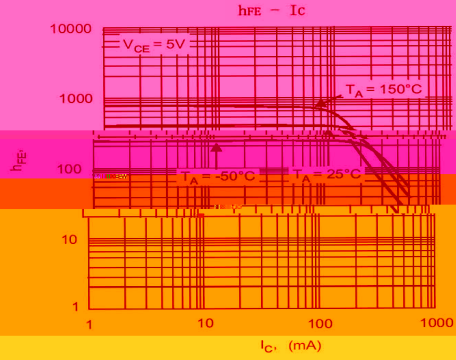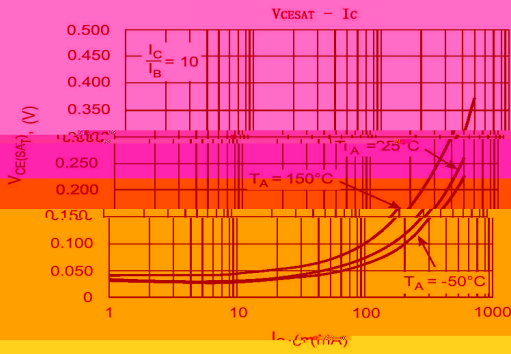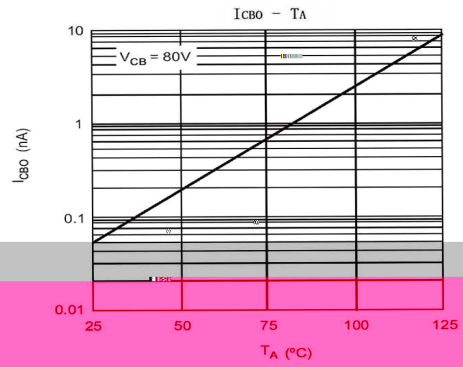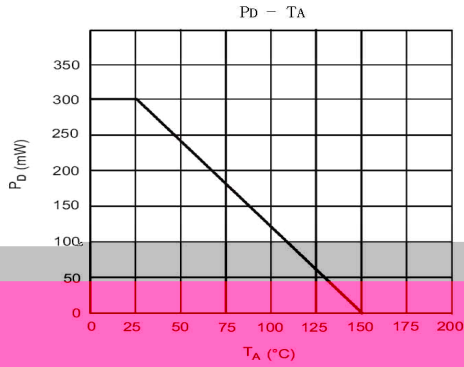

/ Package Dimensions


SOT-23

单位; mm

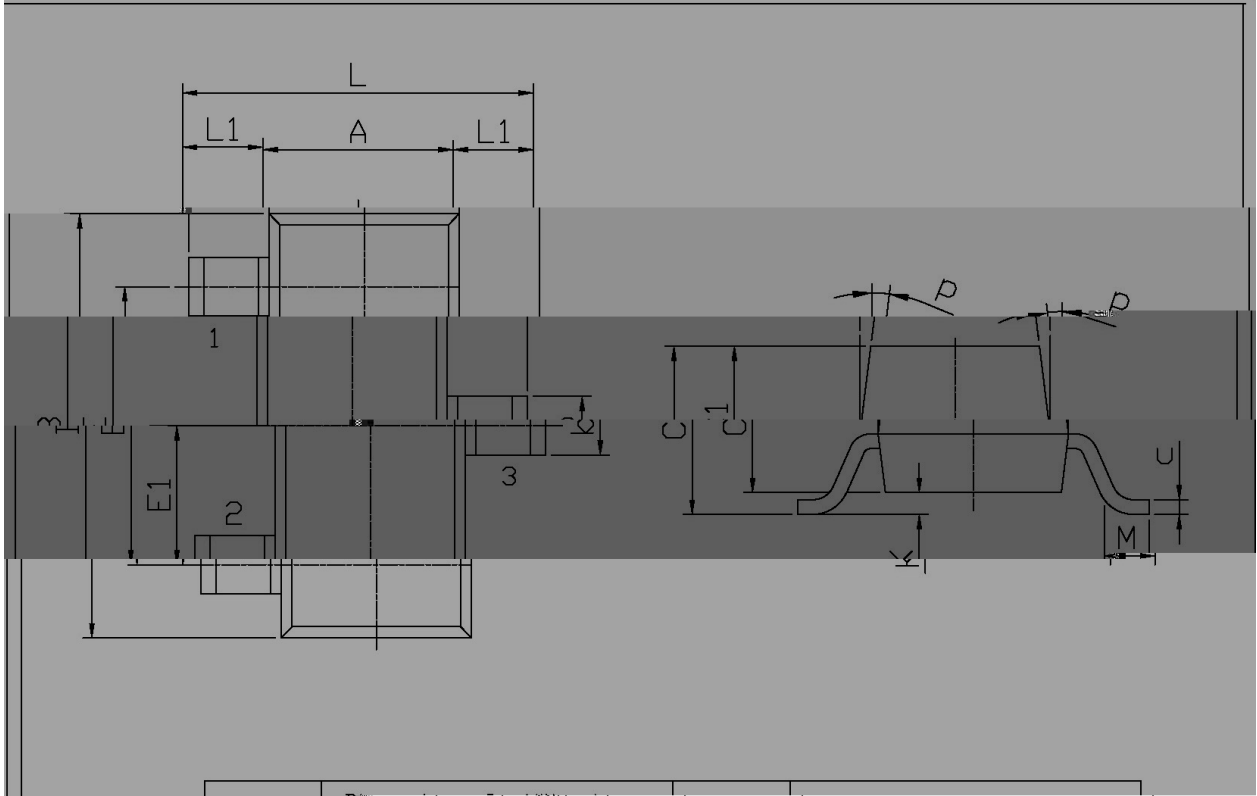

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L1	0.45	0.65	C1	0.90	1.20
A	1.15	1.50	c	0.05	0.20
B	2.70	3.10	K	0	0.10
E	1.70	2.10	M	0.20MIN	
E1	0.85	1.05	P	7°	
b	0.35	0.55			

/ Marking Instructions

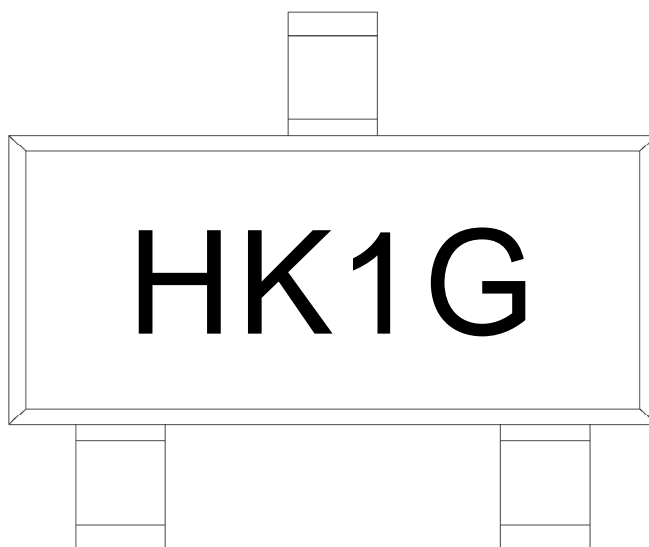

H


K1G

Note:

H: Company Code.

K1G: Product Type Code.

() / K\d g\iXk i\`Gif]`d`]fi`@`I`]\fn`Jfd` \i`e`^ZGY\$=i\`z

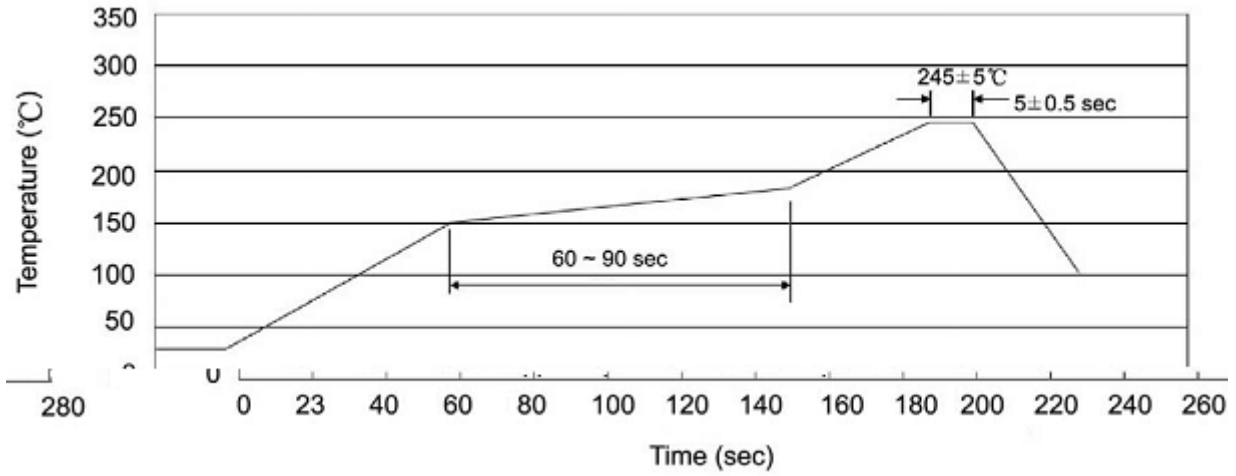

Note:

- | | | | |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 245 5 | 5 0.5sec; | 2.Peak Temp.:245 5 , Duration:5 0.5sec. |
| 3 | 2 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp:260 5 Time:10 1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-23	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices