


## / Descriptions

## / Features

## / Applications

## / Equivalent Circuit




## / Pinning



## / Marking


# MMBTA56



/ Electrical Characteristic Curve

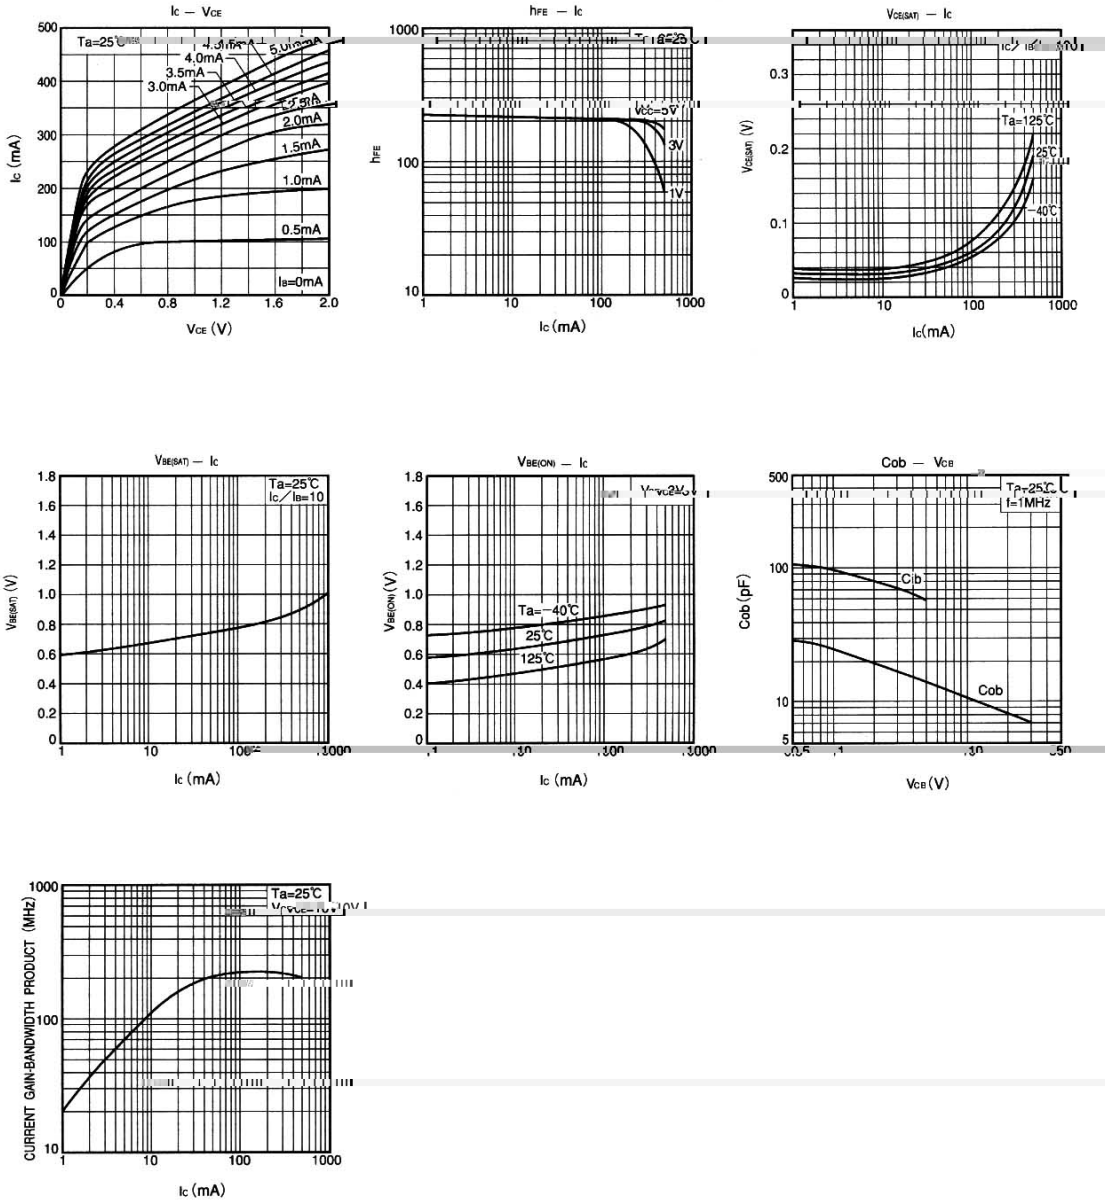

/ Package Dimensions


SOT-23

单位: mm

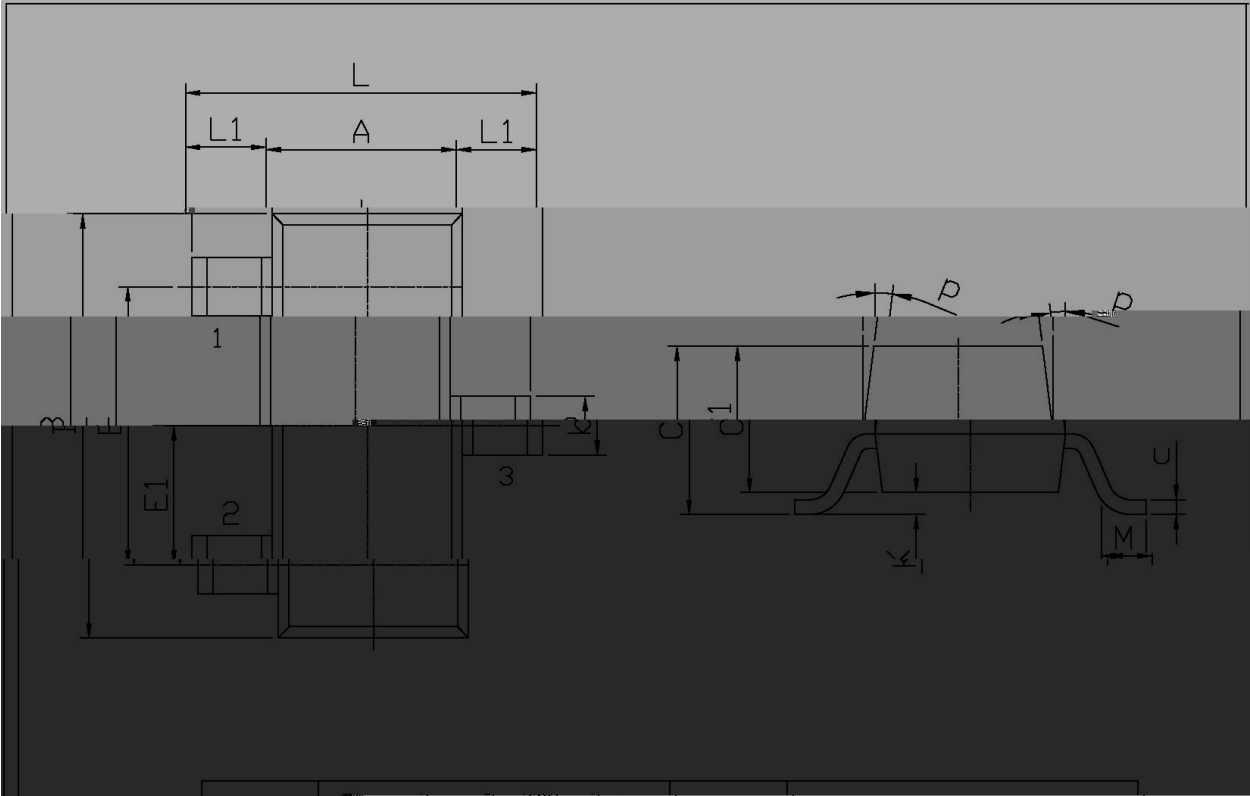


Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeters	
	Min	Max		Min	Max
L	2.2	2.7	C1	0.90	1.20
L1	0.45	0.65	c	0.05	0.20
A	1.15	1.50	K	0	0.10
B	2.70	3.10	M	0.20MIN	
E	1.70	2.10	P	7°	
E1	0.85	1.05			
b	0.35	0.55			

/ Marking Instructions

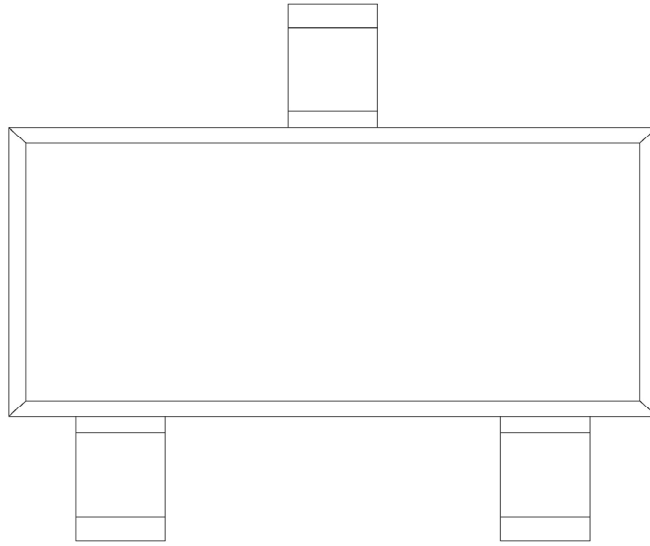

( ) / K\d g\iXk i\`Gif]`d`]fi`@`I`]\`f n`Jf d` \i`e`^ZGY\$=i\`z

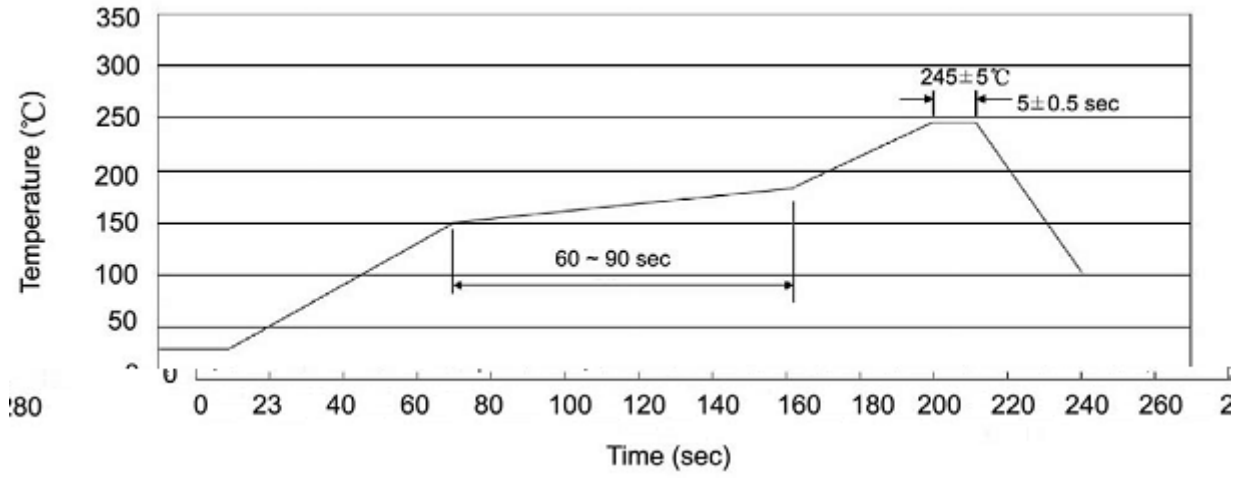

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 × 8	180×120×180	390×385×205

/ Notices