

MUR1060CT


/ Descriptions

TO-220


/ Features

/ Applications

/ Equivalent Circuit









/ Pinning




/ h_{FE} Classifications & Marking

/ Electrical Characteristic Curve

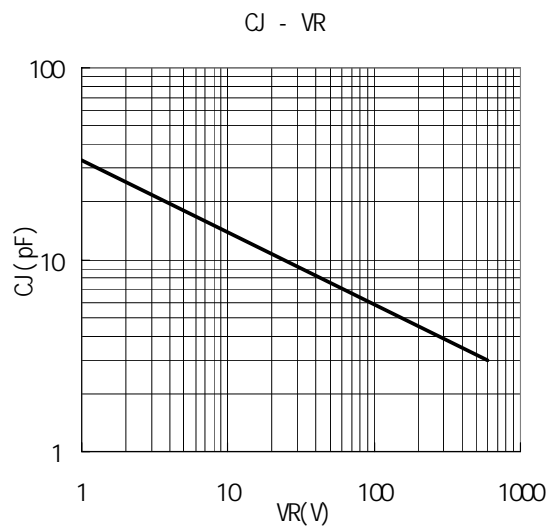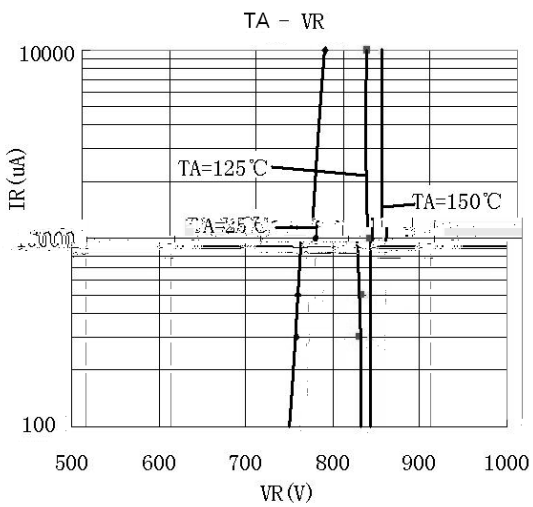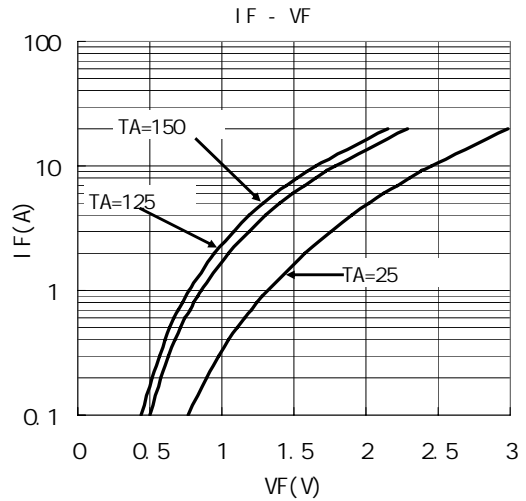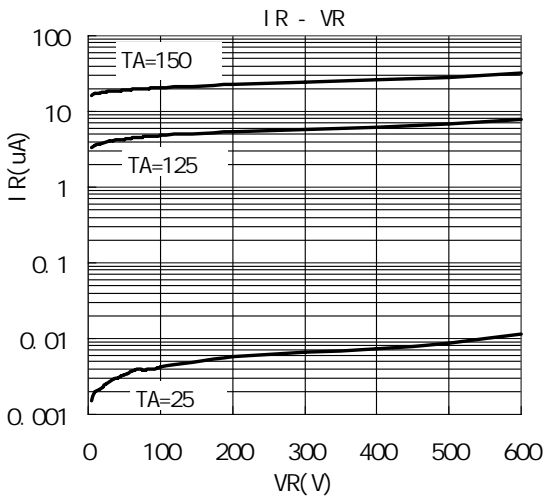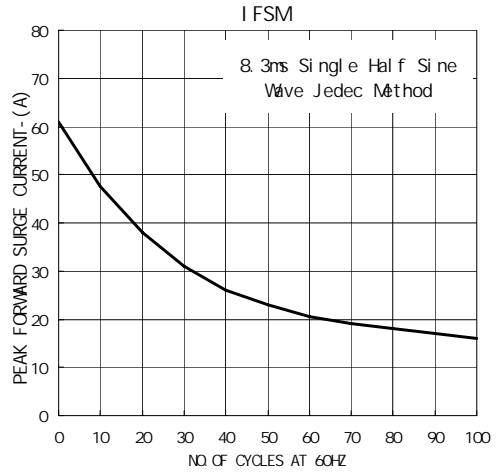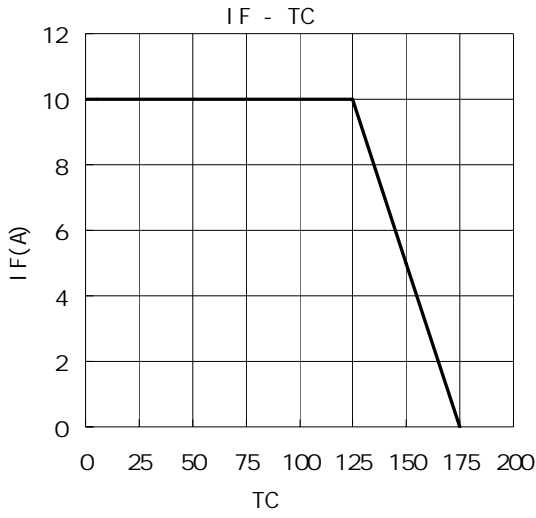


/ Package Dimensions

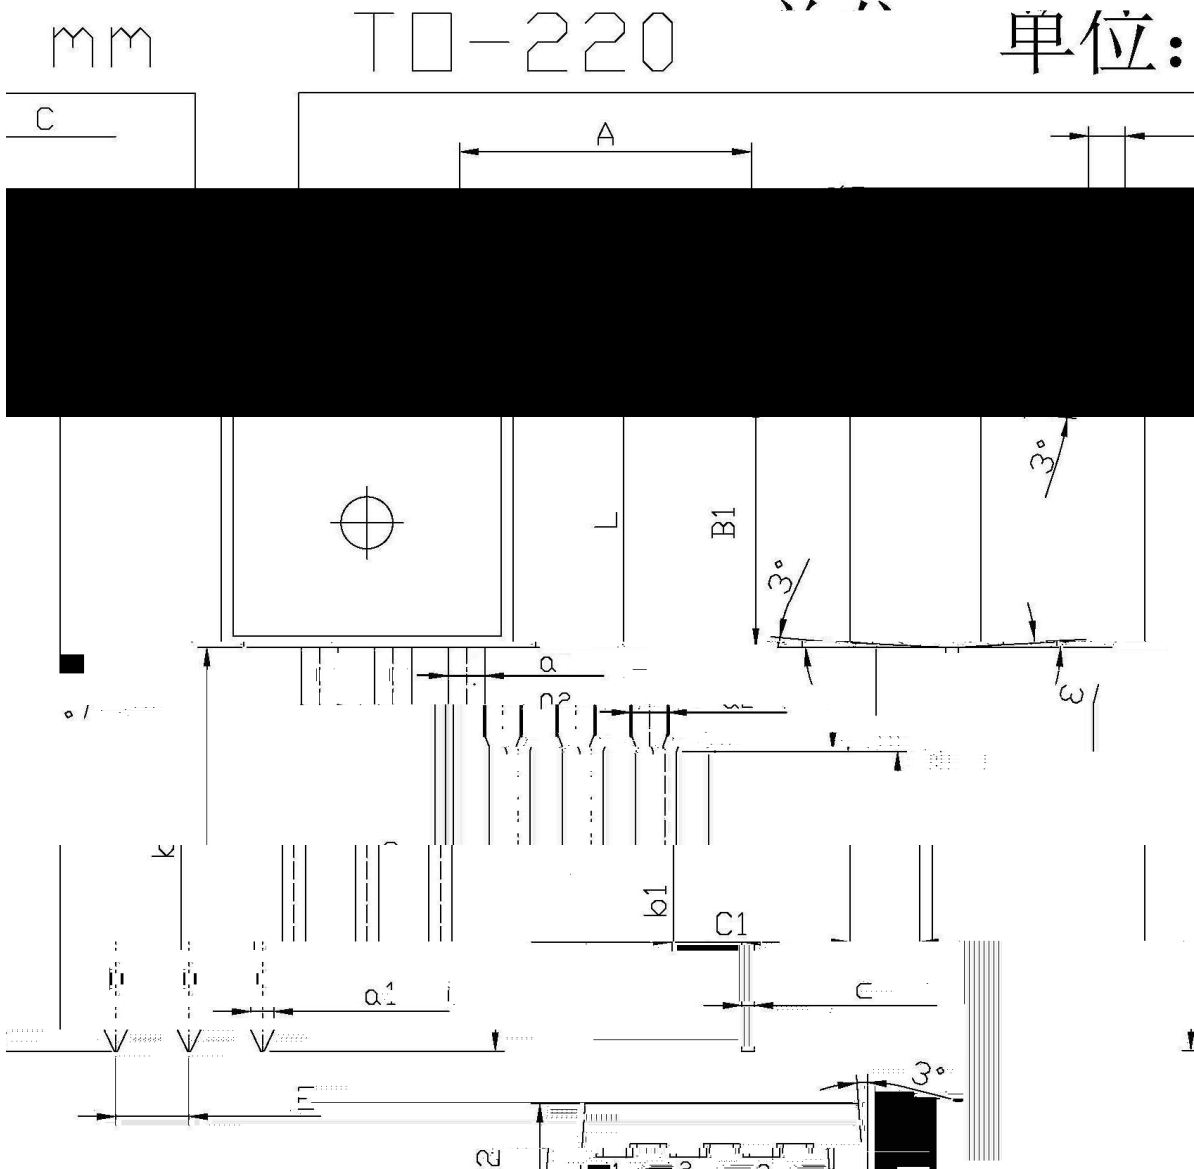


Symbol	Dimensions in millimeters		Symbol	Dimensions in millimeters	
	Min	Max		Min	Max
A	9.8	16.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
B1	9.0	9.4	b	12.6	15.7
C1	2.2	2.6	b1	10.9	12.6
c	0.4	0.6	a	1.22	1.3
C2	4.3	4.7	E	2.34	2.7
			0.2	1.25	1.4

/ Marking Instructions

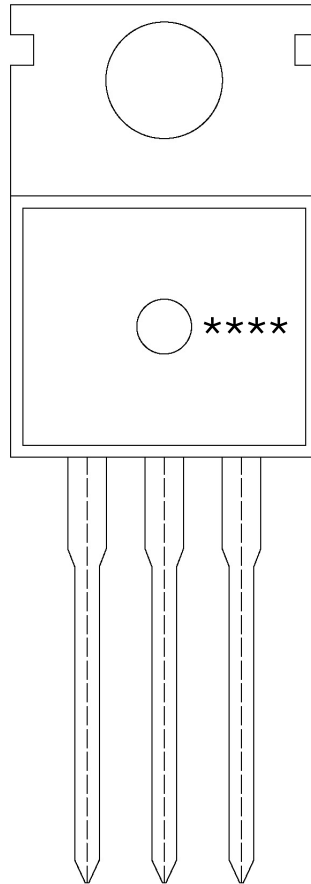

BR
MUR1060
CT:

() / Temperature Profile for Dip Soldering(Pb-Free)

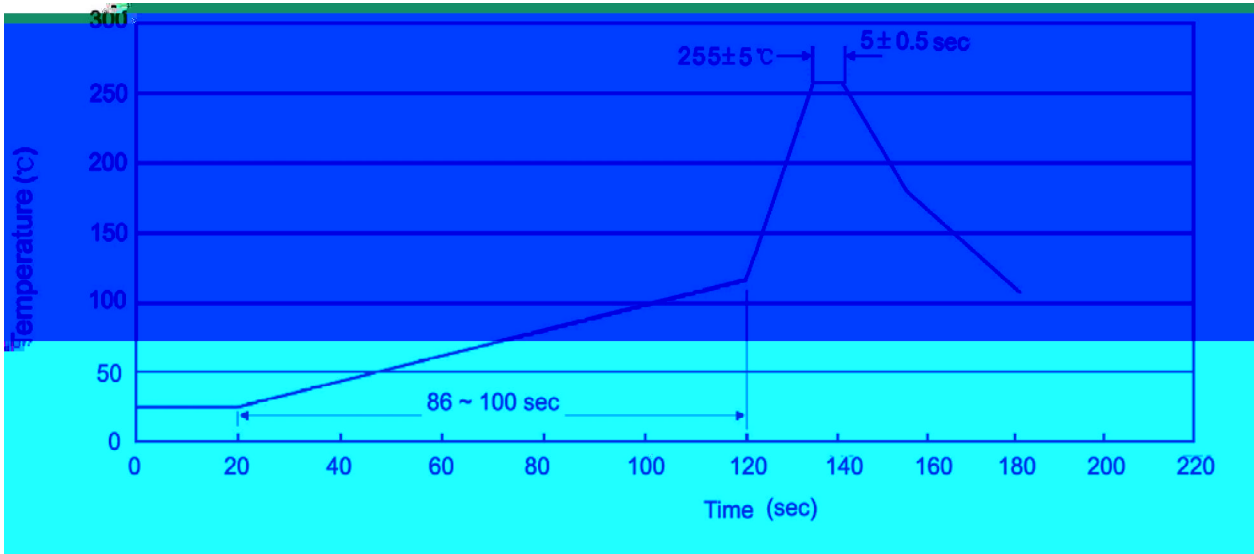

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

						Bag	Inner Box	Outer Box
	Units/Bag	Bags/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

						Tube	Inner Box	Outer Box
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box			
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices