

MUR1640CT

Rev.H Jul.-2018

/ Descriptions

KO\$))'

Ultrafast Recovery Diode in a TO-220 Plastic Package.


/ Features

Silicon epitaxial process to produce ultrafast recovery diode with low reverse leakage current and high reliability.


/ Applications

For high frequency, high voltage, high current rectifier diode, freewheeling diode.

/ Equivalent Circuit



/ Pinning



PIN1 Anode

PIN 2 Cathode

PIN 3 Anode

/ h_{FE} Classifications & Marking

See Marking Instructions

/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	400	V
RMS Voltage	V_{RMS}	280	V
DC Blocking Voltage	V_{DC}	400	V
Average Forward Current	I_F	2 8	A
Non Repetitive Peak Surge Current	I_{FSM}	120	A
Thermal Resistance Junction to Case	R_{JC}	2.8	/W
Operating and Storage Temperature Range	T_j T_{stg}	-55 150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=2A$ $T_c=25$		0.93	1.1	V
		$I_F=2A$ $T_c=150$		0.69	0.8	V
		$I_F=8A$ $T_c=25$		1.1	1.3	V
		$I_F=8A$ $T_c=150$		0.92	1.1	V
Instantaneous Reverse Current	I_R Note 1	$V_R=400V$ $T_a=25$			1.0	A
		$V_R=400V$ $T_a=150$			100	A
Reverse Recovery Time	t_{rr}	$I_F=0.5A,$ $I_{RR}=0.25A$ $I_R=1.0A,$			50	ns

/Notes






(%
effect.

2.
single chip

/Short duration pulse test used to minimize self-heating

/ Unless otherwise noted, values for the parameters of a


/ Electrical Characteristic Curve

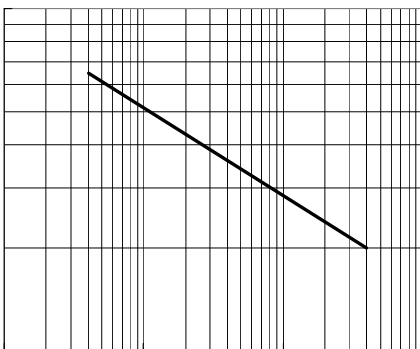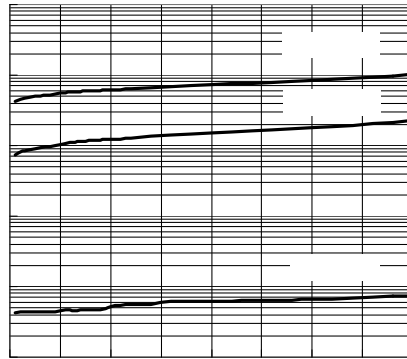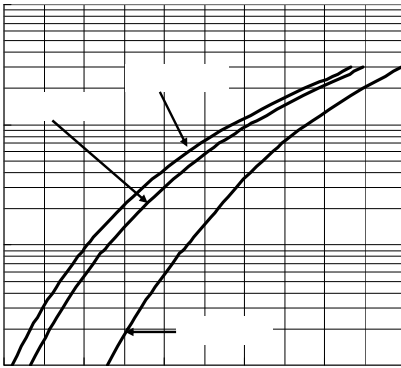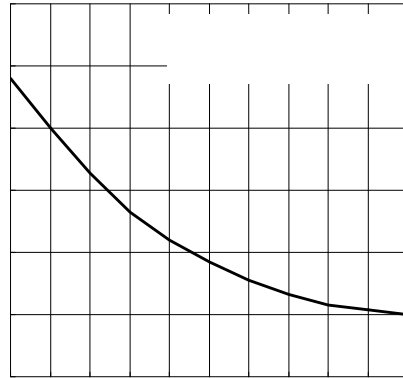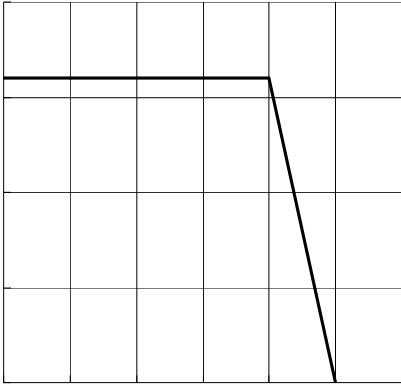

MUR1640CT
Rev.H Jul.-2018

DATA SHEET

/ Marking Instructions

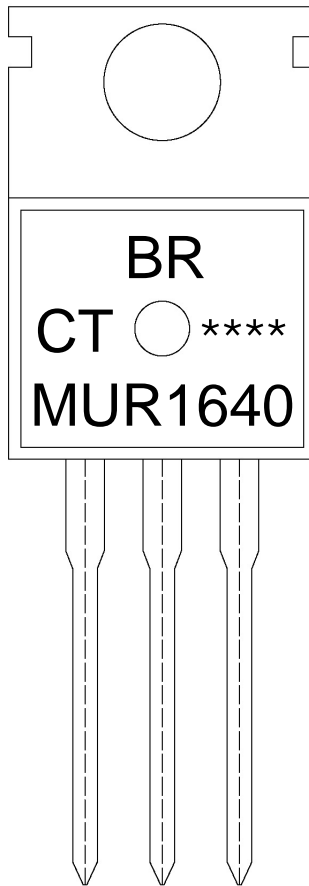

BR

ML R(64'

CK:

Note:


BR: Company Code

ML R(64' Product Type.

CK: Internal Structure

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

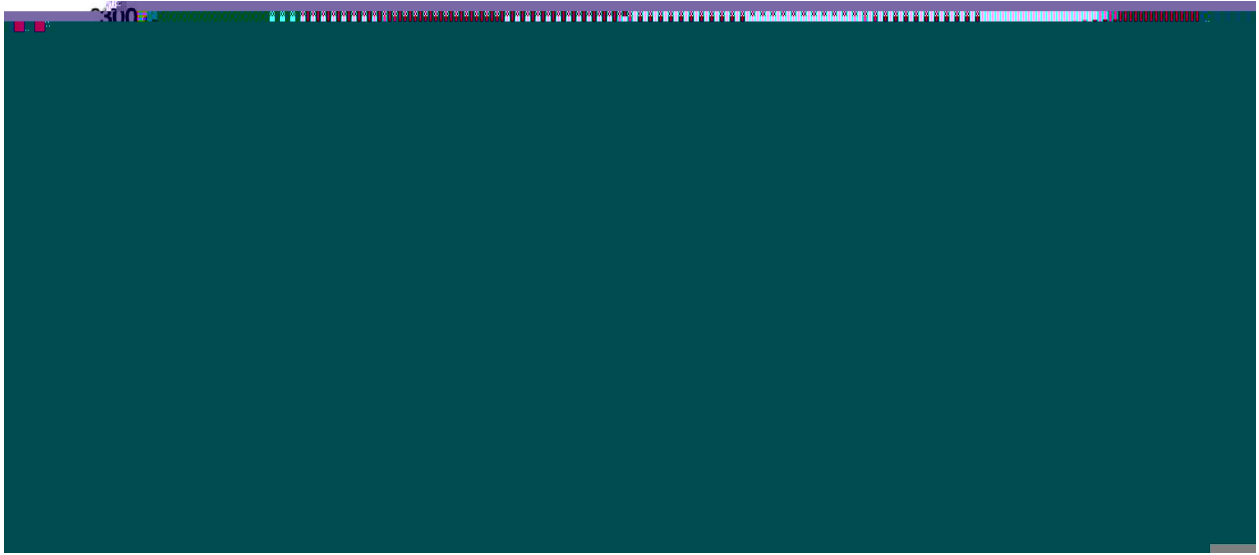

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp.:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-220/F	200	10	2,000	5	10,000	135×190	237×172×102	560×245×195

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-220/F	50	20	1,000	5	5,000	532×31.4×5.5	555×164×50	575×290×180

/ Notices