



50V ~ 1000V      2.0A      SMBF  
:

c      RoHS      2011/65/EU      0



PIN	DESCRIPTION
1	Cathode
2	Anode


The recommended mounting pad size

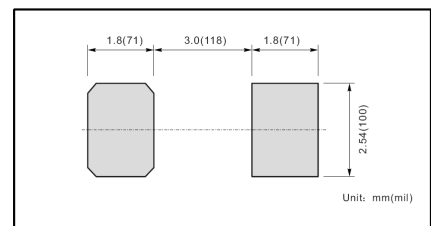

℃	( )								
)									℃




SMDFF

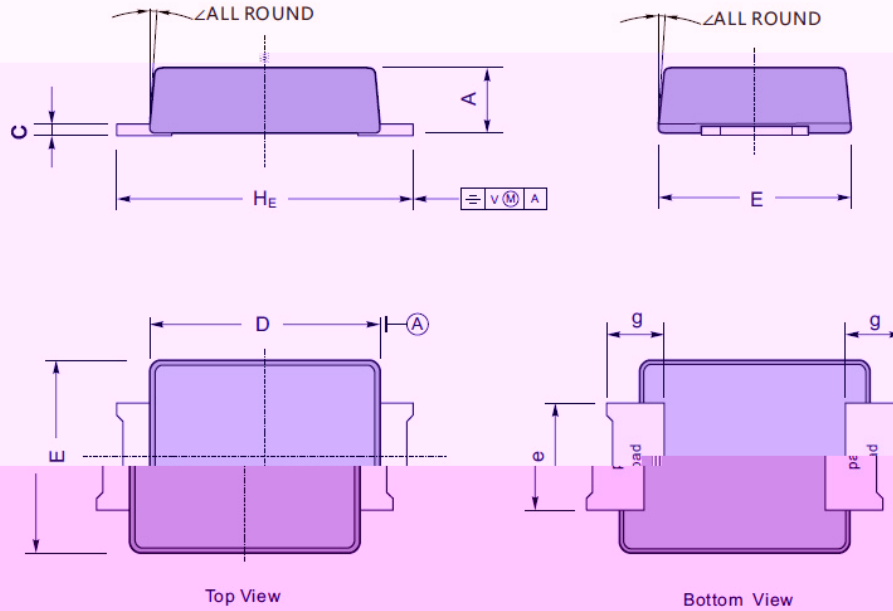


UNIT		A	C	D	E	H <sub>E</sub>	e	g	$\angle$
	max	1.3	0.26	4.4	3.7	5.5	2.2		9°
mm	min	1.1	0.18	4.2	3.5	5.1	1.9	1.0	
mil	max	51	10	173	146	216	86	40	
	min	43	7	165	138	200	75		

# Marking

Type number	Marking code
RS2ABF	R2AB
RS2BBF	R2BB
RS2DBF	R2DB
RS2GBF	R2GB
RS2JBF	R2JB
RS2KBF	R2KB
RS2MBF	R2MB

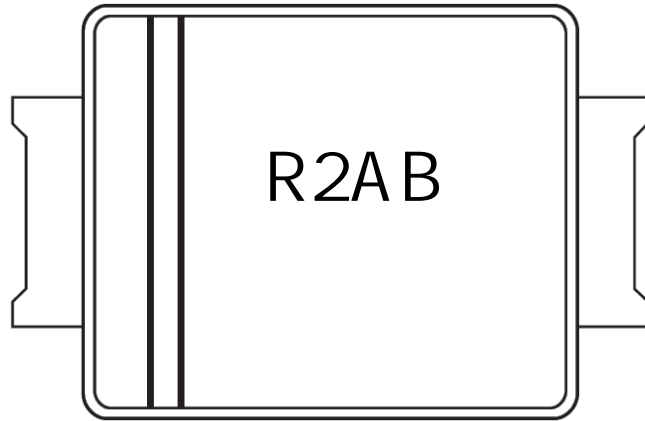

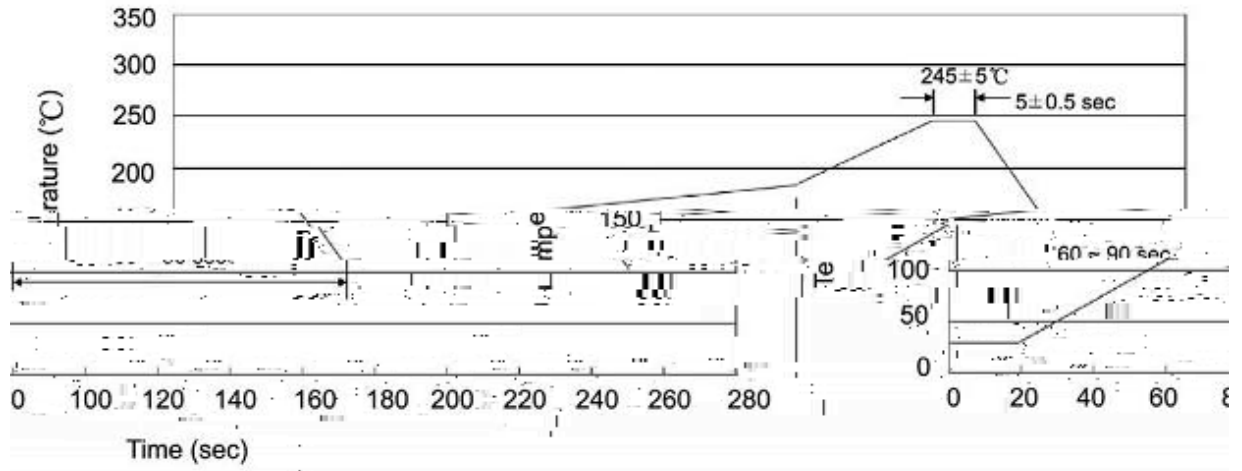

±

±

±

±

±

±

±

±

封装形式	包装数量					包装尺寸			
	只卷盘	卷盘盒	只盒	盒箱	只箱	:		盒	箱
						"			