

/ Descriptions

/ Features


94V-0

/ Applications

/ Equivalent Circuit





/ Pinning

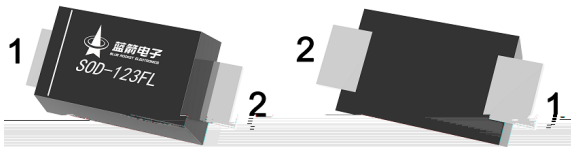

PIN	DESCRIPTION
1	Cathode
2	Anode

The recommended mounting pad size

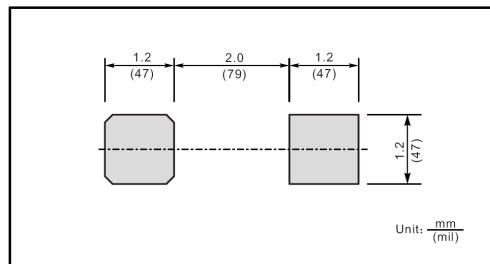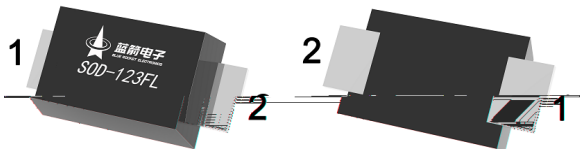

/ Marking

SMF5.0(C)A~SMF440(C)A



/ Absolute Maximum Ratings(Ta=25)

		±	
		±	
	θ		
	θ		
	θ		

SMF5.0(C)A~SMF440(C)A


DATA SHEET

/ Electrical Characteristic Curve

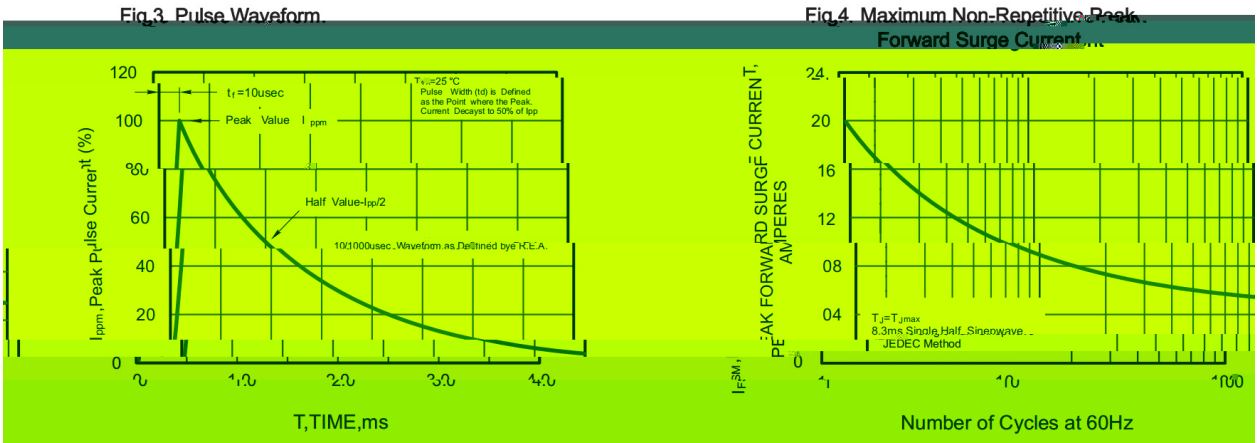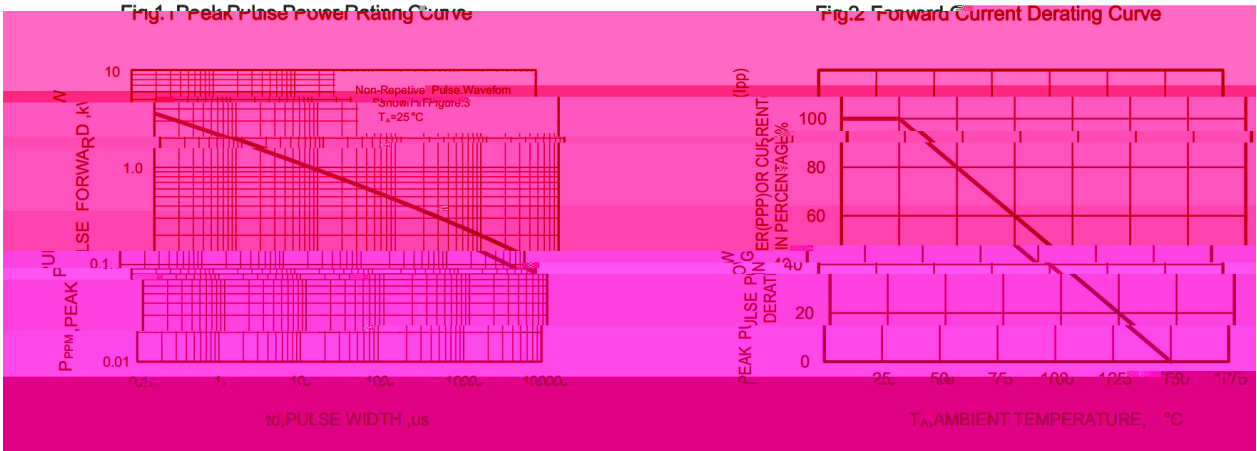


/ Package Dimensions

SOD-123FL

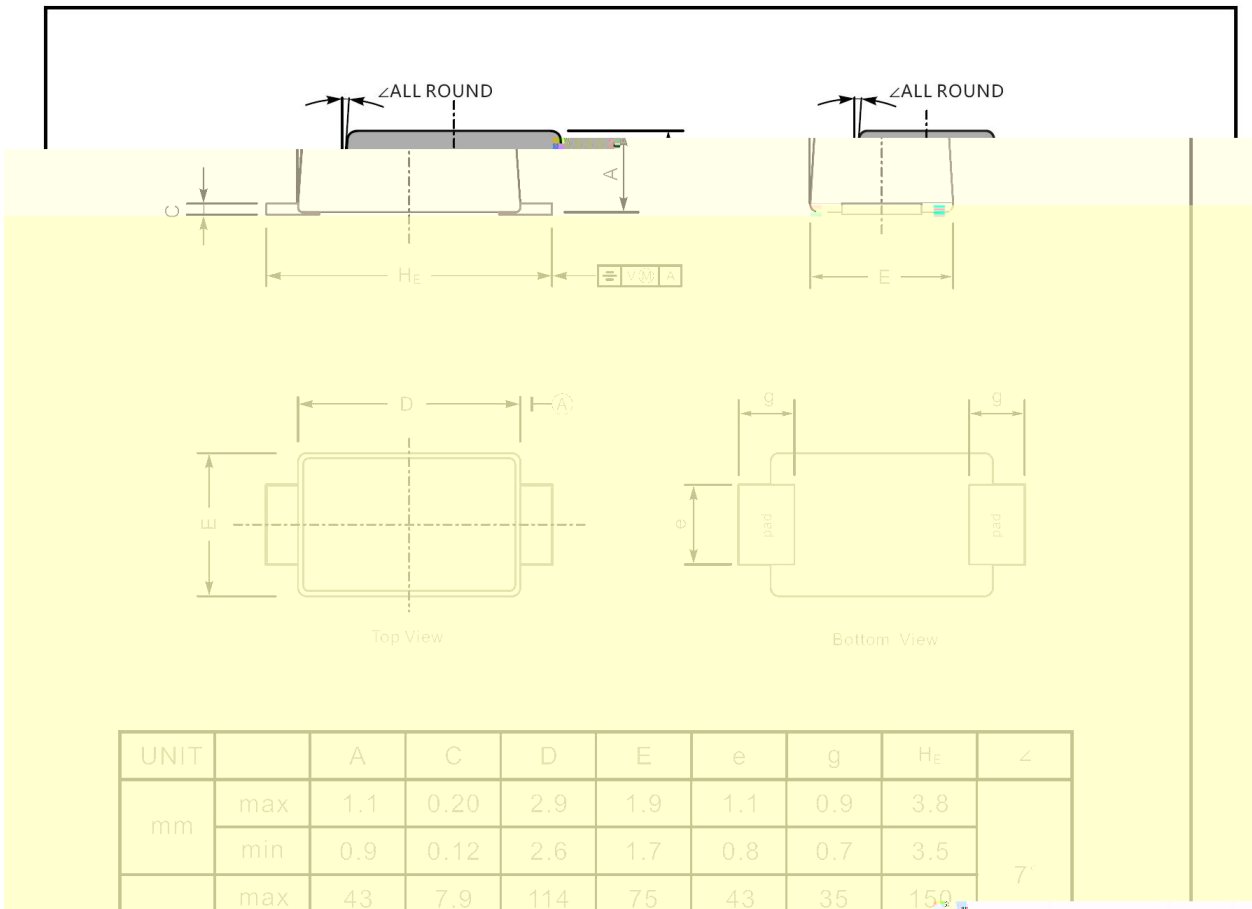


/ Marking Instructions

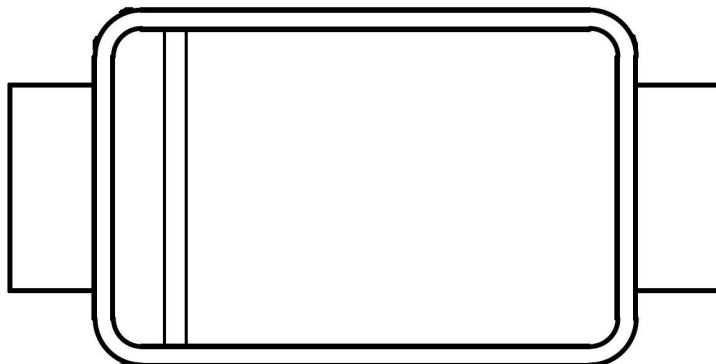

AE

AE

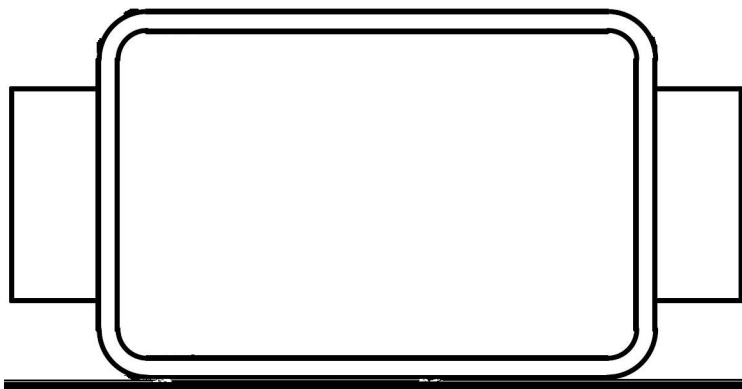

CAE

CAE

() /

±

±

±

±

/ Resistance to Soldering Heat Test Conditions

±

±

/ Packaging SPEC.