



A	2021-5-13	ALL	w01		



1 0 2 4 1 8

2 2 0 2 2 4 / 1 V 6 . . . V 2

40V

2.0A

:


:

2 2 0 2 2 / 1 4 / 1 V 2

2

.

2 2



2 2 0 2 1 4 . .



2 2 H 2 2 V / 2 1 6 4 2 E 6 4 V D 6 2

2

参数	符号	数值	单位
	()		
			°C
			°C
			°C

)

)

2 2 H 2 2 T / 6 4 6 2 6 6 6 / 4 4 4 4 V D 6 2

2

参数	符号	测试条件	数值	单位
		°C		
		°C		



2 2 8 2 2 T 7 4 4 4 2 4 4 4 7 4 4 4 2 4 7 2

Fig. 1. Forward Current-Resistance Curve

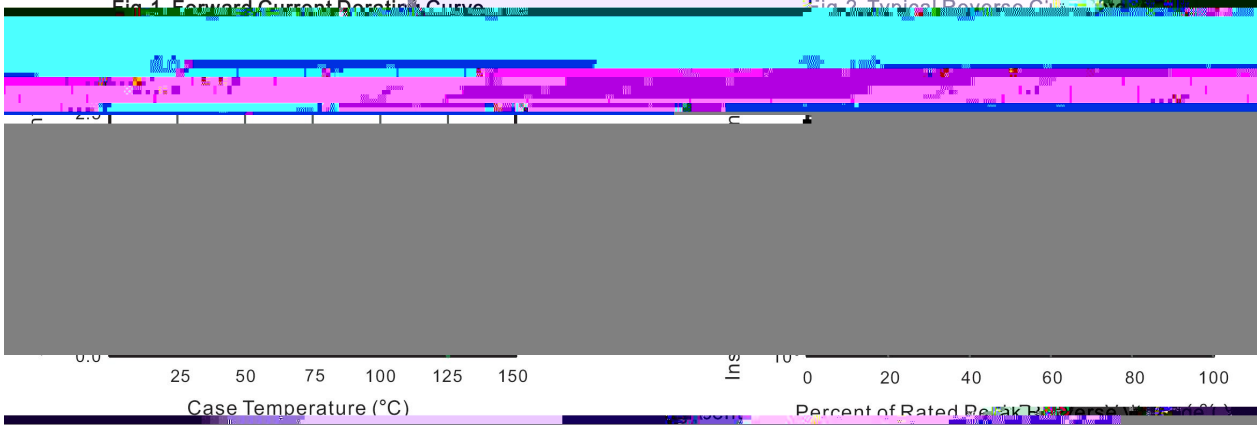


Fig. 2. Typical Reverse Current



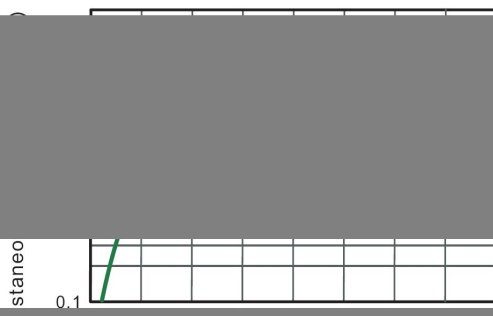


Fig. 5. Maximum Allowable Power Dissipation

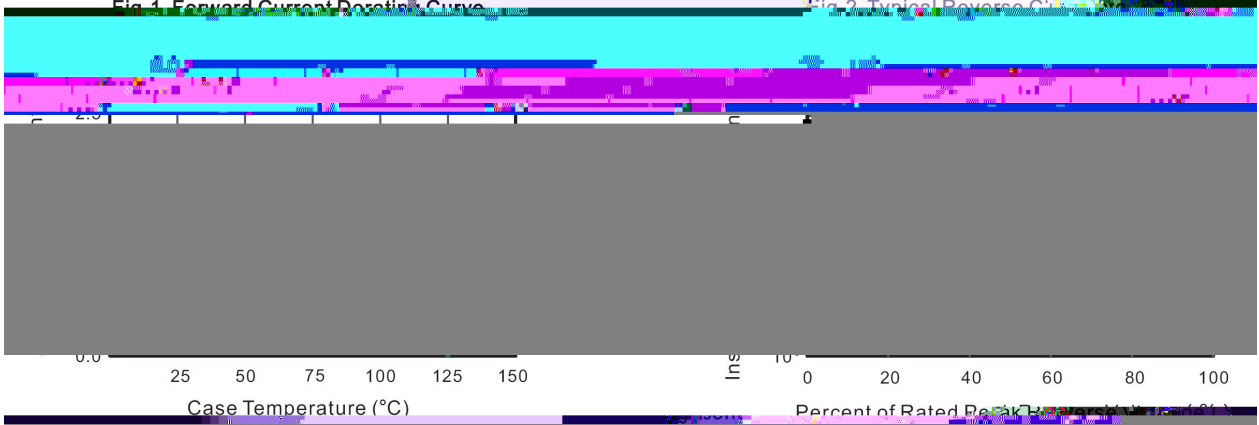

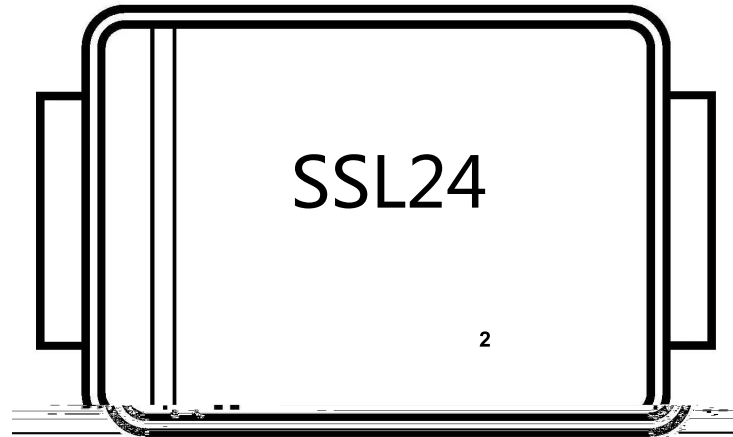

SSL24

2

1

3

SSL24

