



100V 3.0A






Fig. 1 Typical Forward Characteristics

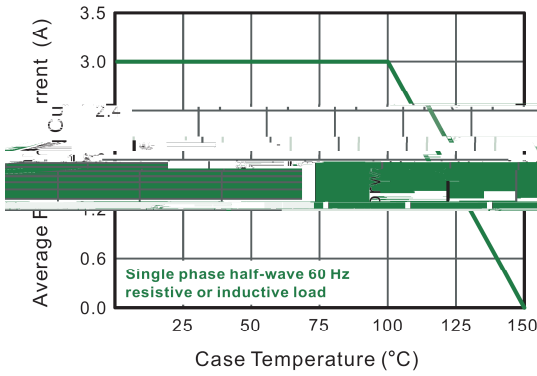


Fig. 2 Typical Forward Current vs. Percent of Rated Peak Reverse Voltage

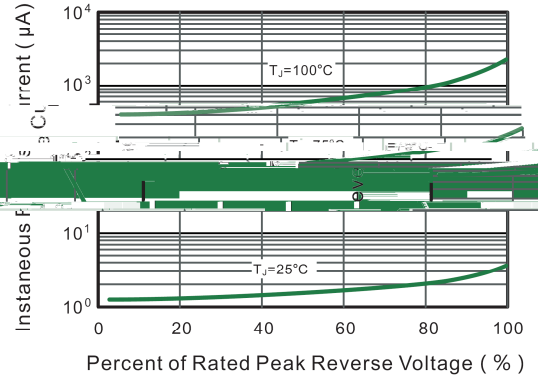


Fig. 3 Typical Forward Characteristics

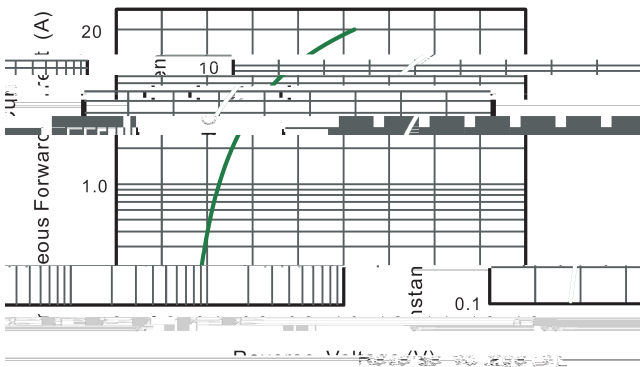


Fig. 4 Typical Junction Capacitance

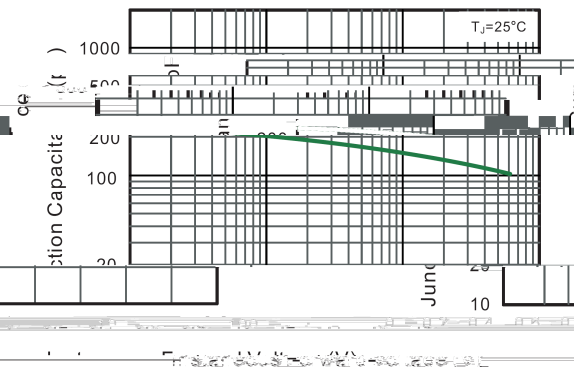


Fig. 5 Maximum Non-Repetitive Peak Forward Surge Current



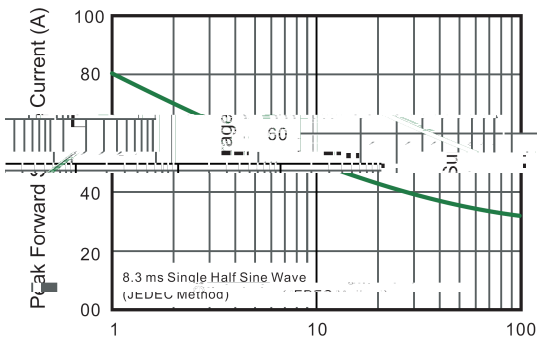


Fig. 6 Typical Transient Thermal Impedance



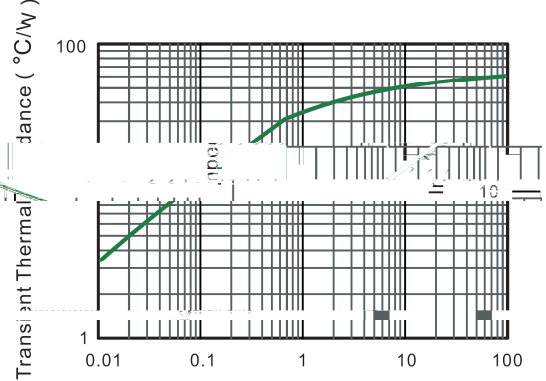

.....



SMBF



ALL ROUND




.....

.....



Temperature Profile for IR Reflow Soldering(Pb-Free)

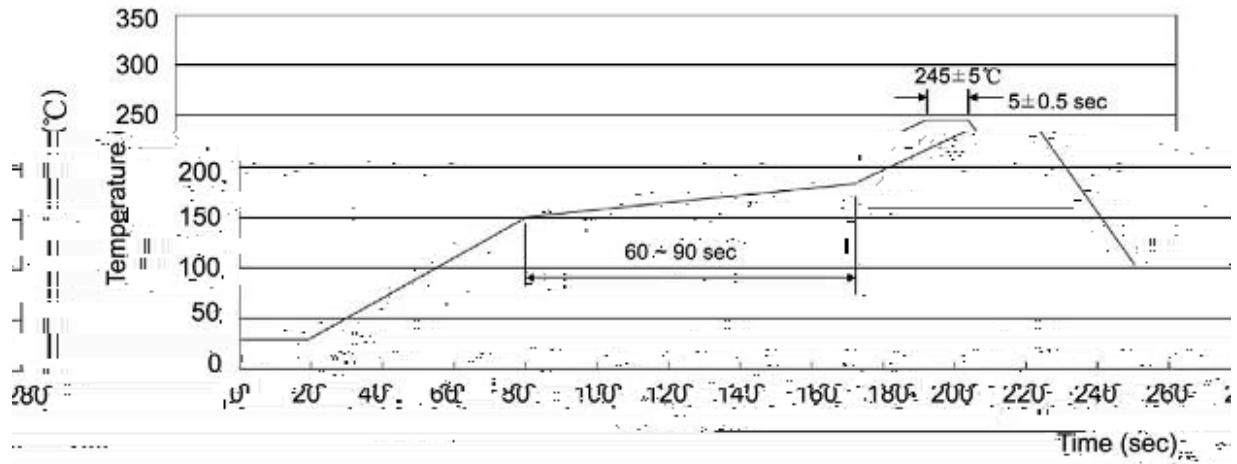

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box

