


Rev.E Mar.-2016

TO-92      PNP      Silicon PNP transistor in a TO-92 Plastic Package.

High  $P_C$  and  $I_C$ .






Medium power amplifier applications.





PIN 1   Collector      PIN 2   Base      PIN 3   Emitter

See Marking Instructions.



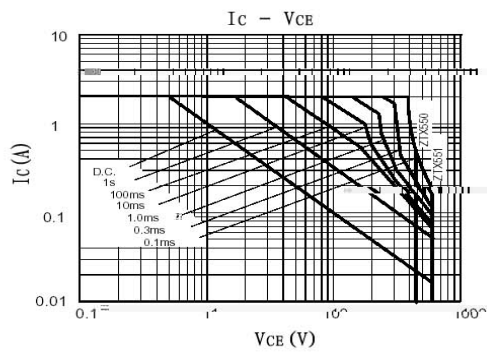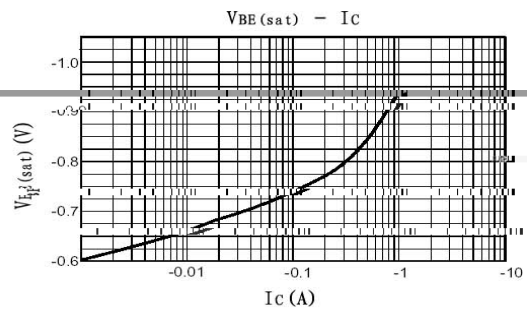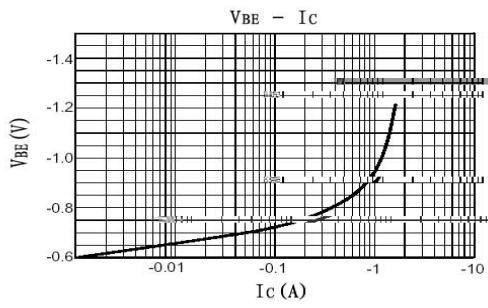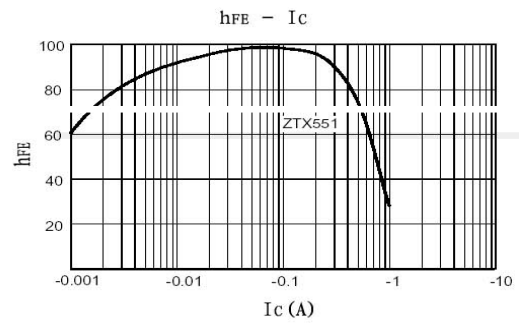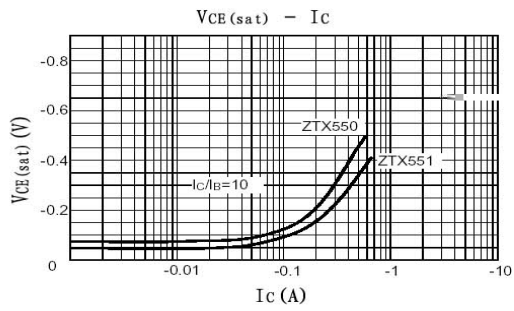



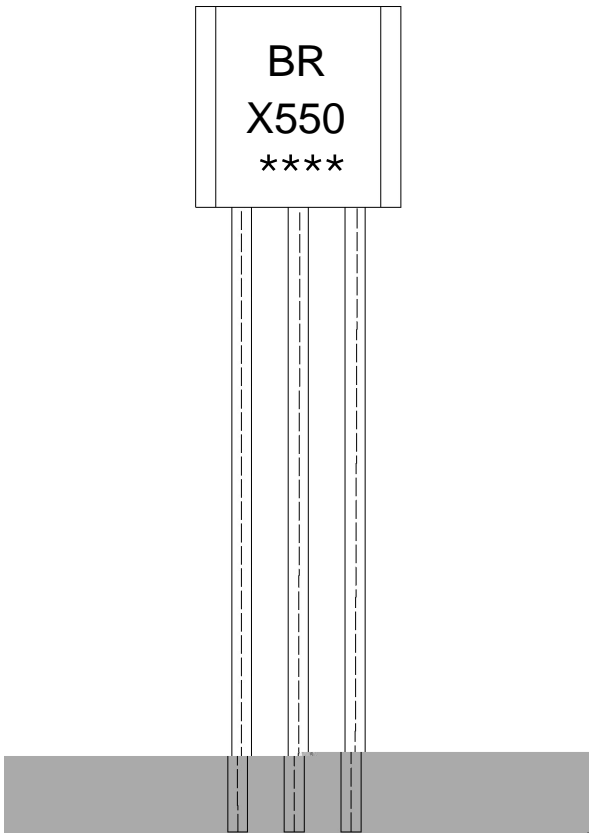

BR:

X550

\*\*\*\*

Note:

BR: Company Code.

X550: Product Type.

\*\*\*\*: Lot No. Code,code change with Lot No.


**Note:**

- |   |        |           |   |
|---|--------|-----------|---|
| 1 | 25 150 | 60 90sec; | 1.Preheating:25~150 , Time:60~90sec.    |
| 2 | 255±5  | 5±0.5sec; | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | 2 10   | /sec.     | 3. Cooling Speed: 2~10 /sec.            |

270±5                      10±1 sec.                      Temp:270±5                      Time:10±1 sec

**/ BULK**

Package Type	Units					Dimension (unit mm3)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

**/ AMMO**

Package Type	Units			Dimension (unit mm3)
	Units/tape /	Tape/Inner Box /	Rows/Inner Box	