


TO-92 PNP Silicon PNP transistor in a TO-92 Plastic Package.

2SC1740

Excellent h_{FE} linearity, complementary pair with 2SC1740.







General purpose applications.




PIN1 Base PIN 2 Collector PIN 3 Emitter

h_{FE} Classifications Symbol	Q	R	S
h_{FE} Range	120~270	180~390	270~560

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-60	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-6.0	V

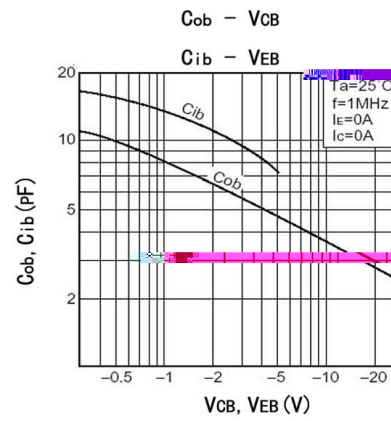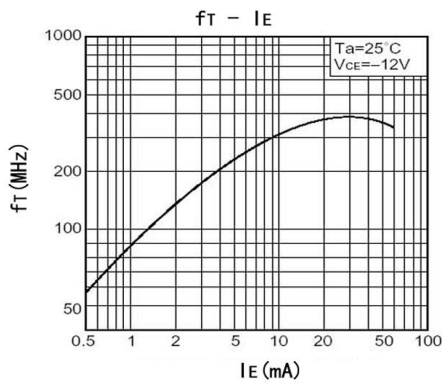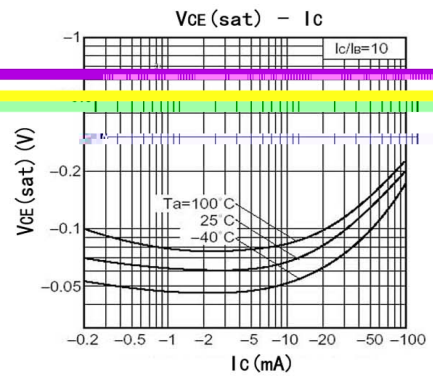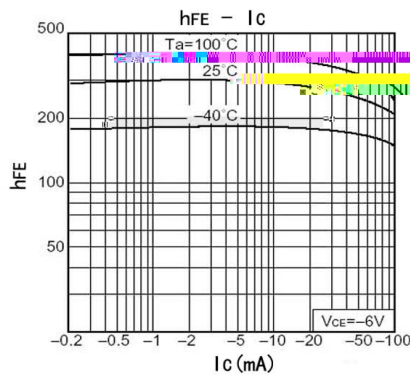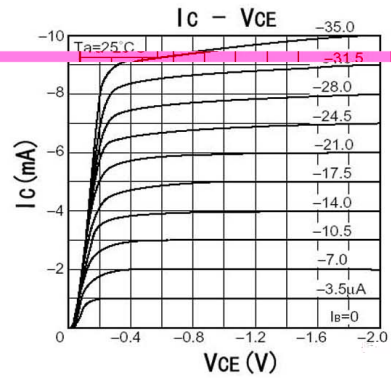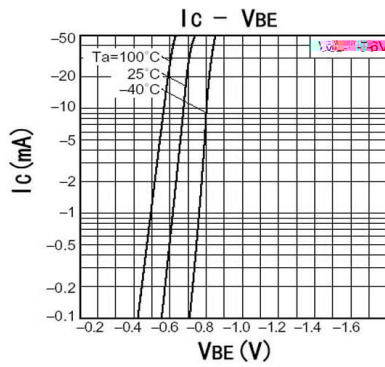

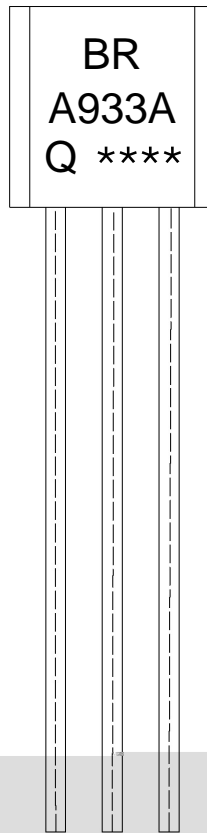

BR:

A 933A

Q:

h_{FE}


Note:

BR: Company Code.

A933A: Product Type.

Q: h_{FE} Classifications Symbol.

****: Lot No. Code,code change with Lot No.

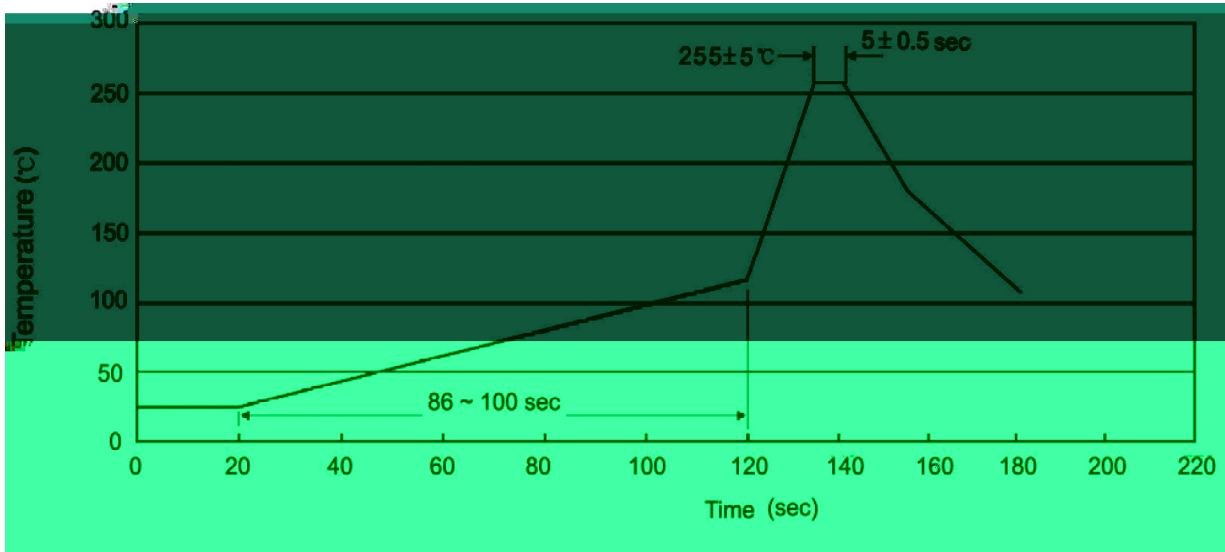
Note:

- | | | | | | |
|---|-------|-----|-----------|--------|--|
| 1 | 25 | 150 | 60 | 90sec; | 1. Preheating: 25~150 , Time: 60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2. Peak Temp.: 255±5 , Duration: 5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

 270 ± 5
 10 ± 1 sec.

 Temp: $270 \pm 5^\circ\text{C}$

 Time: 10 ± 1 sec

/ BULK

Package Type	Units					Dimension (unit mm ³)		
	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type	Units					Dimension (unit mm ³)	
	Units/tape /	Tape/Inner Box /	Rows/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Inner Box	Outer Box
TO-92	3,000	1	120	10	30,000	328×230×42	480×346×235 547×407×268