

/ Descriptions

TO-92 NPN Silicon NPN transistor in a TO-92 Plastic Package.

/ Features

Low noise and high power gain.

/ Applications

low noise amplifier at VHF, UHF and CATV band applications.

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Collector PIN 3 Emitter

/ hFE Classifications & Marking

See Marking Instructions.


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	20	V
Collector to Emitter Voltage	V_{CEO}	12	V
Emitter to Base Voltage	V_{EBO}	3.0	V
Collector Current - Continuous	I_C	100	mA
Collector Power Dissipation	P_C	600	mW
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55~150	

/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=10V$ $I_E=0$			1.0	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=1.0V$ $I_C=0$			1.0	A
DC Current Gain	h_{FE}	$V_{CE}=10V$ $I_C=20mA$	50	120	300	
Transition Frequency	f_T	$V_{CE}=10V$ $I_C=20mA$		6.5		GHz
Output Capacitance	C_{ob}	$V_{CB}=10V$ $I_E=0$ $f=1.0GHz$		0.65	1.0	pF
Insertion Power Gain	$ S_{21e} ^2$	$V_{CE}=10V$ $I_C=20mA$ $f=1.0GHz$		9.5		dB
Noise Figure	$NF_{(1)}$	$V_{CE}=10V$ $I_C=7.0mA$ $f=1.0GHz$		1.1		dB
	$NF_{(2)}$	$V_{CE}=10V$ $I_C=40mA$ $f=1.0GHz$		1.8	3.0	dB


/ Electrical Characteristic Curve

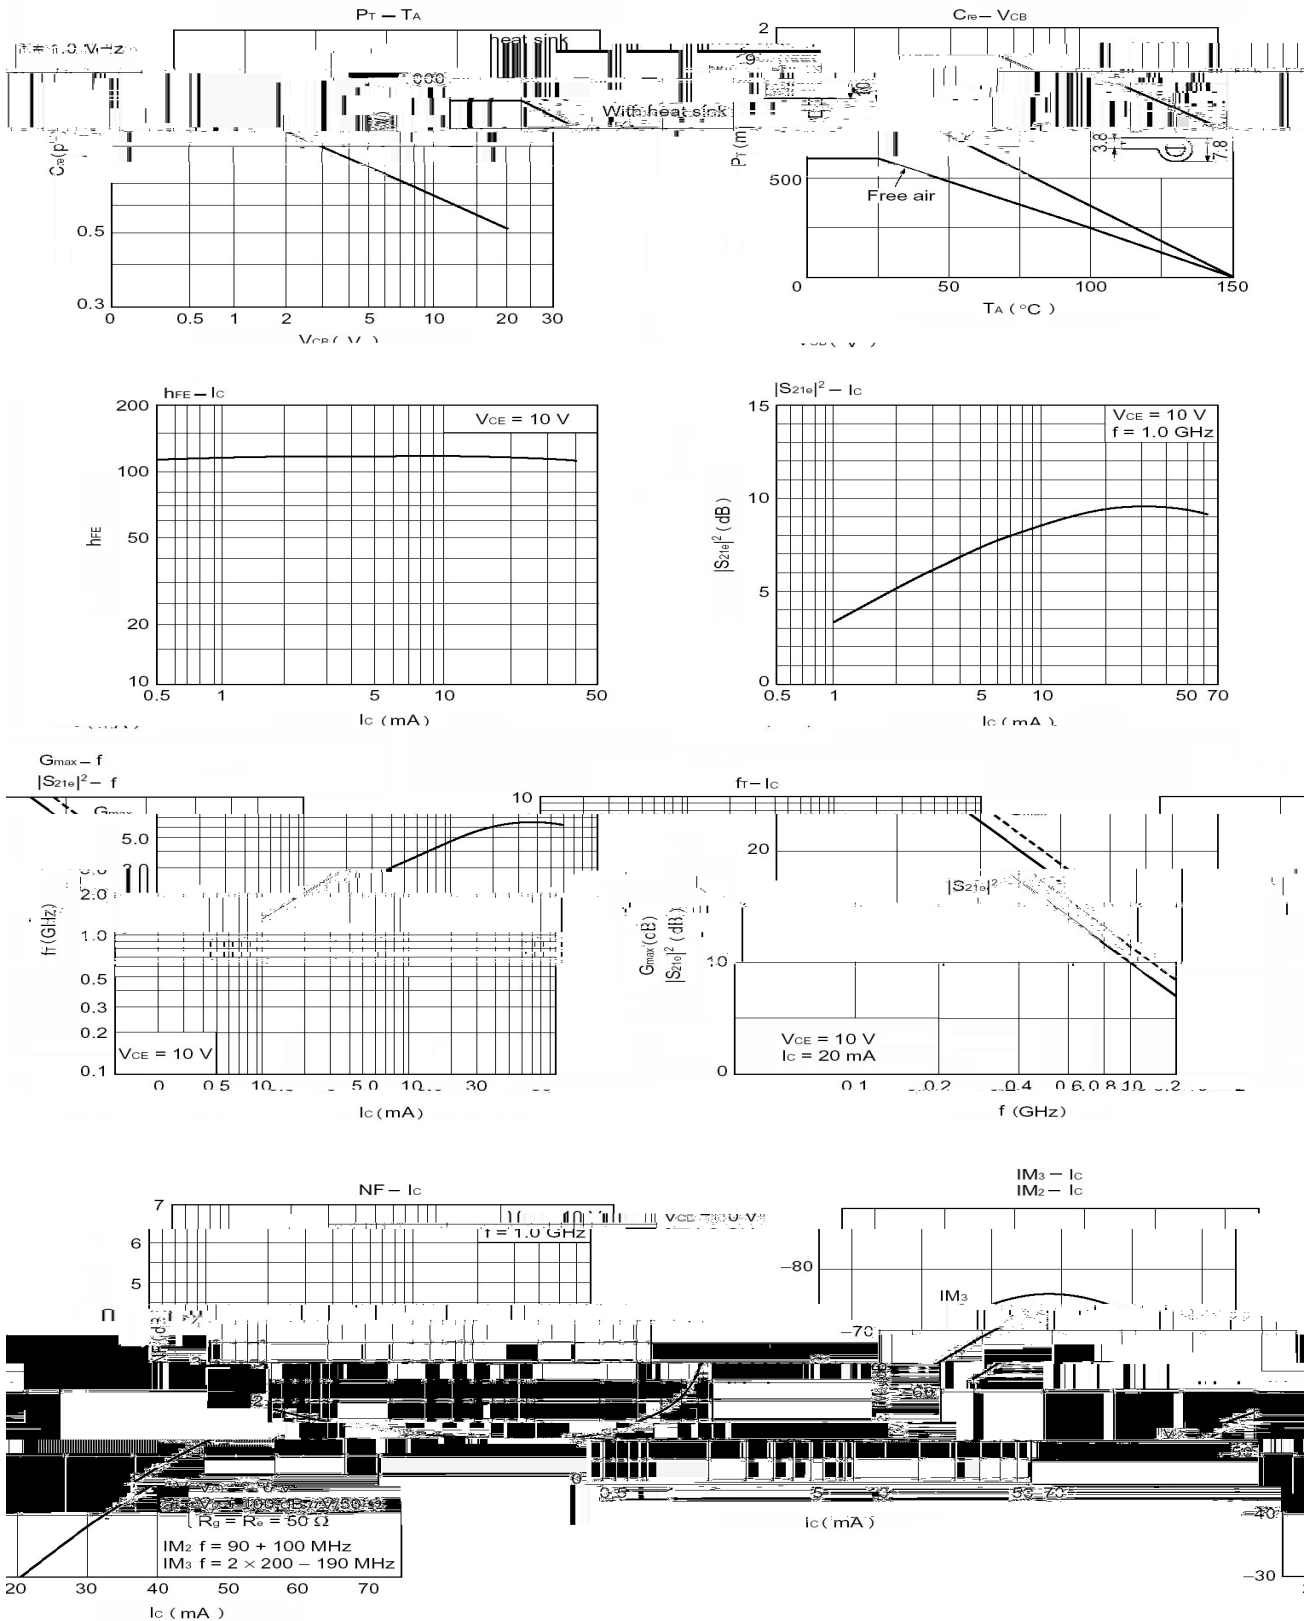


/ Package Dimensions

T0-92

Unit: mm

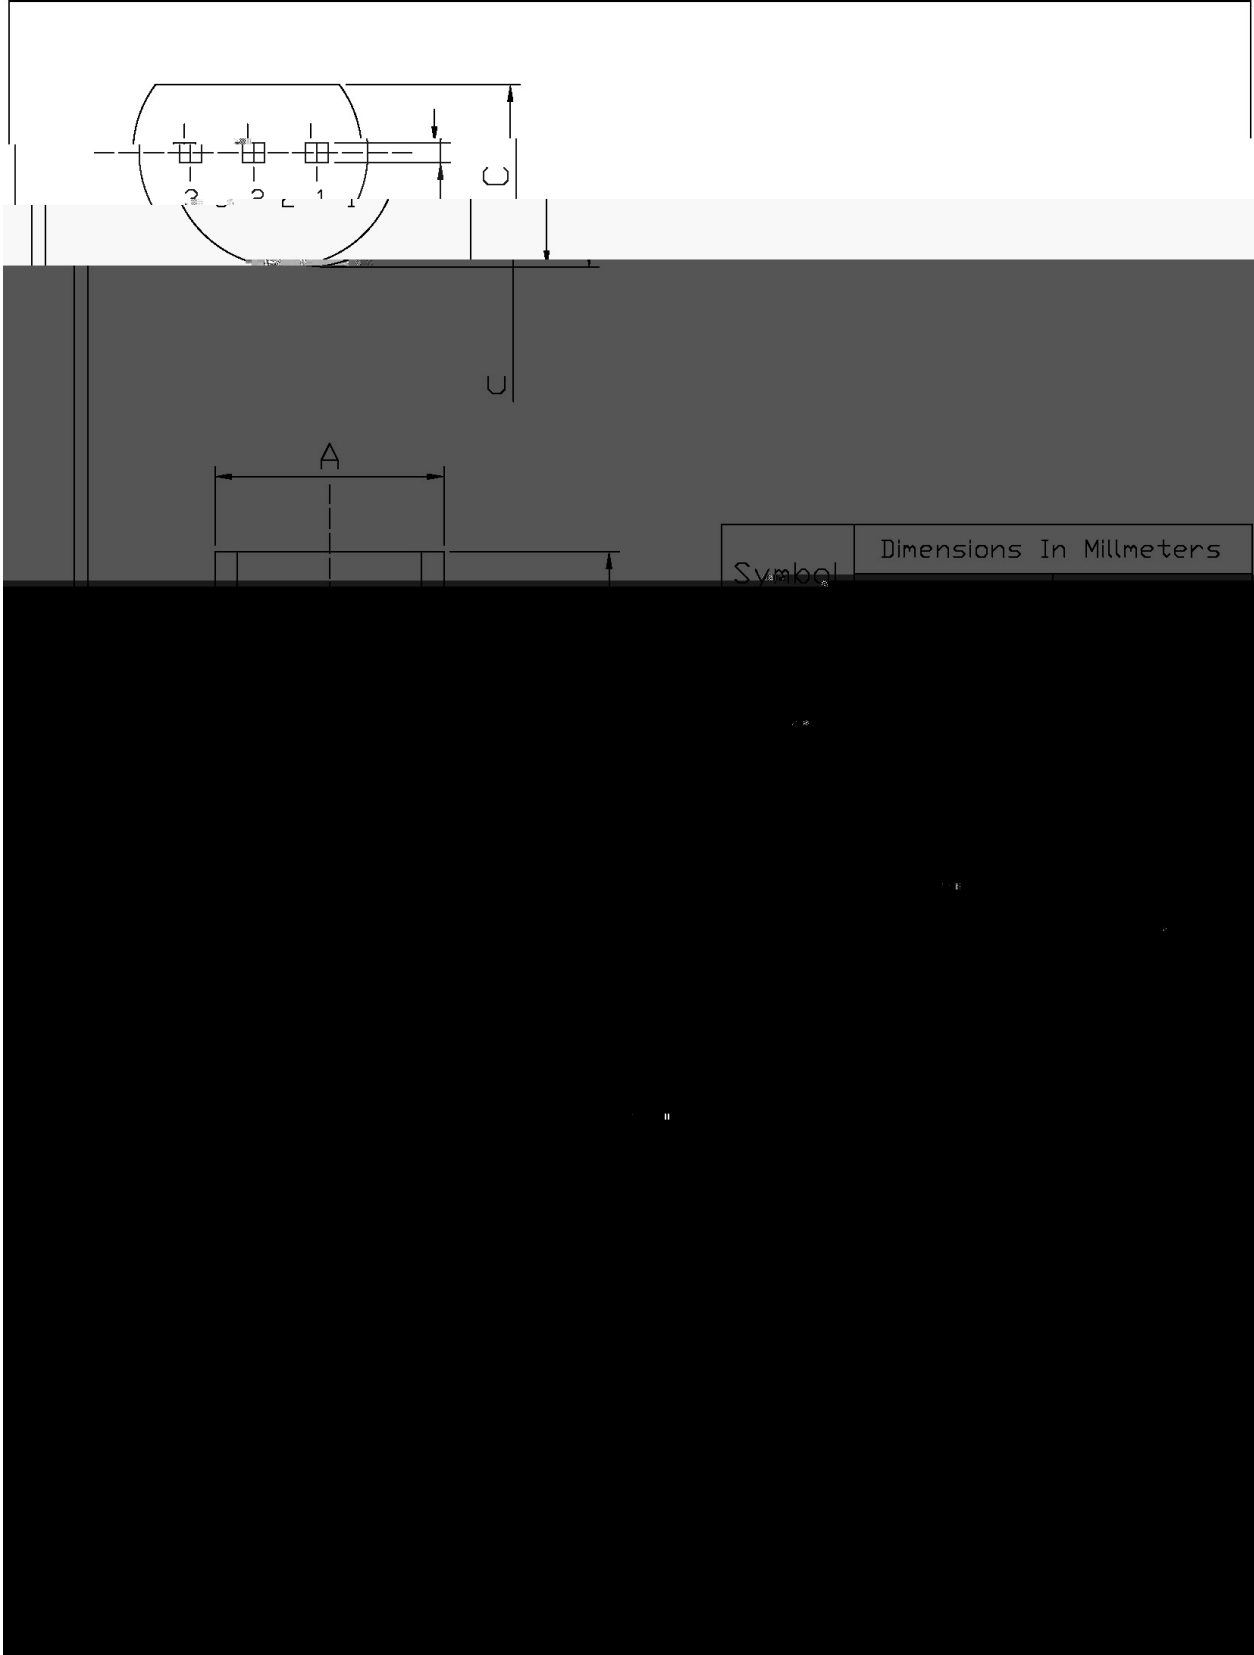

/ Marking Instructions

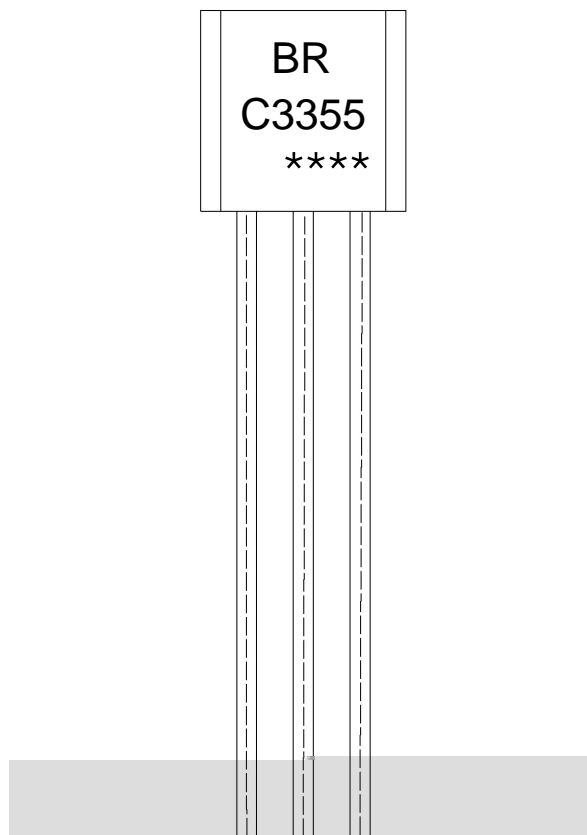

BR:

C3355


Note:

BR: Company Code.

C3355: Product Type.

****: Lot No. Code,code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

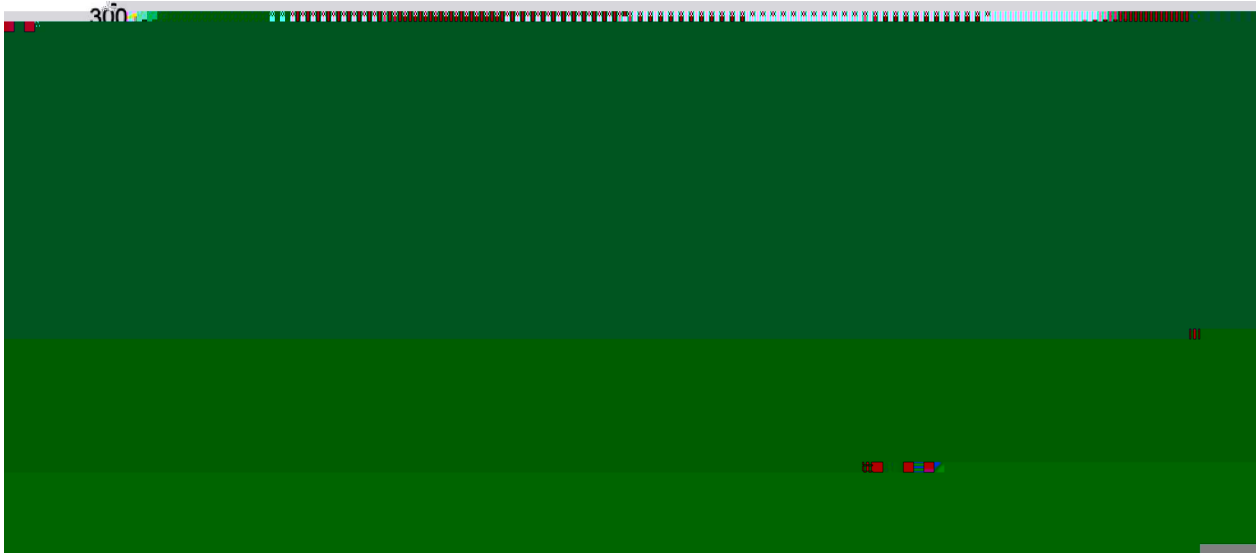

Note:

- | | | | | | |
|---|-------|-----|-----------|--------|---|
| 1 | 25 | 150 | 60 | 90sec; | 1.Preheating:25~150 , Time:60~90sec. |
| 2 | 255±5 | | 5±0.5sec; | | 2.Peak Temp.:255±5 , Duration:5±0.5sec. |
| 3 | | 2 | 10 | /sec. | 3. Cooling Speed: 2~10 /sec. |

/ Resistance to Soldering Heat Test Conditions

270±5 10±1 sec. Temp:270±5 Time:10±1 sec

/ Packaging SPEC.

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)		
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Bag 袋	Inner Box 盒	Outer Box 箱
TO-92	1,000	10	10,000	5	50,000	135×190	237×172×102	560×245×195
	1,000	10	10,000	10	100,000	135×190	237×172×102	560×245×375

/ AMMO

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm3)	
	Units/tape 只/纸带	Tape/Inner Box 纸带/盒	Rows/Inner Box 纸带层/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Inner Box 盒	Outer Box 箱
TO-92	3,000	1	120	10	30,000	328×230×42	小箱 480×346×235, 大箱 547×407×268

/ Notices