

/ Descriptions

Low dropout linear regulator in a SOT-89 Plastic Package.


/ Features

Low power consumption, Low voltage drop, Small temperature drift coefficient, High input voltage up to 20V, The static current 1.5 A, The output voltage accuracy , Qualified to AEC-Q100 Standards for High Reliability, HF Product.


/ Applications

For use in power equipment, Communication equipment, Audio and video equipment, Meet the stringent requirements of automotive applications.

/ Equivalent Circuit

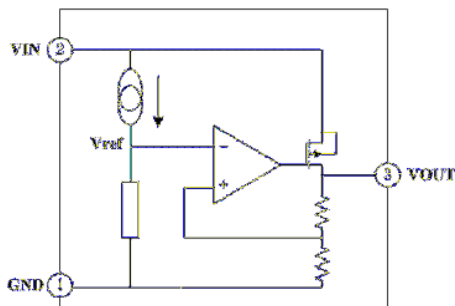

/ Pinning

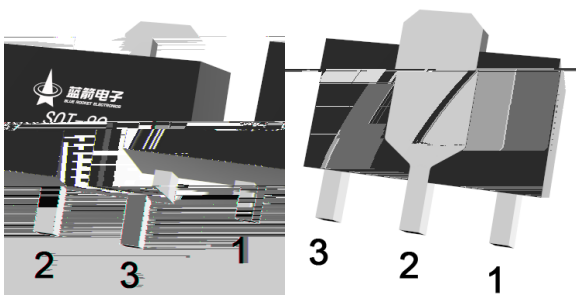

PIN1 GND PIN 2 VIN PIN 3 VOUT

/ Marking

See Marking Instructions.

/ Absolute Maximum Ratings($T_a=25$)

Parameter	Symbol	Rating	Unit
Working Voltage	V_{IN}	-0.3~+20	V
Thermal Resistance	R_{JA}	200	/W
Power Consumption	P_W	500	mW
Storage Temperature	T_{STG}	-50~+125	
Working Temperature	T_A	-40~+85	

Notes: If the device operating conditions over the maximum rating of the above-mentioned conditions, may cause permanent damage to the device. The above parameters is only part of the operating conditions the maximum, we do not recommend the device running outside the scope of this specification. If the device to work long hours under the condition of absolute maximum limit, its stability may be affected.

/ Electrical Characteristics($T_a=25$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
The Output Voltage	V_{OUT}	$V_{IN}=5.3V, I_{OUT}=10mA$	3.234	3.30	3.366	V
The Output Current	I_{OUT}	$V_{IN}=5.3V$	300			mA
Load Regulation	V_{OUT}	$V_{IN}=5.3V$ $1mA \leq I_{OUT} \leq 300mA$		37	100	mV
Low Dropout	V_{DIF}	$I_{OUT}=100mA, V_{OUT}=2\%$		195	300	mV
Static Power	I_{SS}	$V_{IN}=5.3V$		1.5	3.0	μA
Linear Regulation	$\frac{V_{OUT}-V_{OUT}^*}{V_{IN}}$	$4.3V \leq V_{IN} \leq 20V$ $I_{OUT}=1mA$			0.2	%/V
The Input Voltage	V_{IN}				20	V
Temperature Coefficient	$\frac{V_{OUT}}{T_A \cdot V_{OUT}}$	$V_{IN}=5.3V, I_{OUT}=10mA$ $-40 \leq T_A \leq 85$		100		ppm/

 $V_{IN}=5.3V$


2%

 V_{DIF}


Note: V_{DIF} is defined as the input voltage minus the output voltage that produces a 2% change in the output voltage from the value at $V_{IN}=5.3V$ with a fixed load.

/ Typical Application Circuit


/ Basic Application

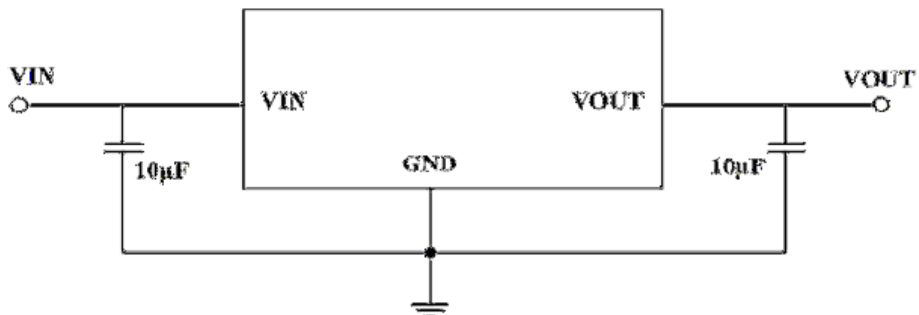

/ High Output Current Voltage Regulator

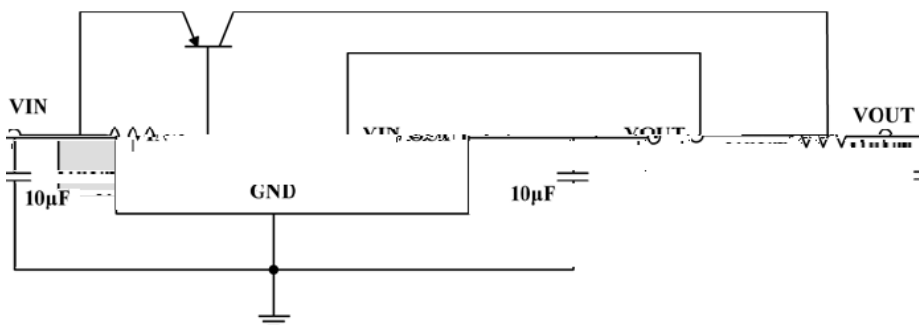


/ Short-Circuit Protection

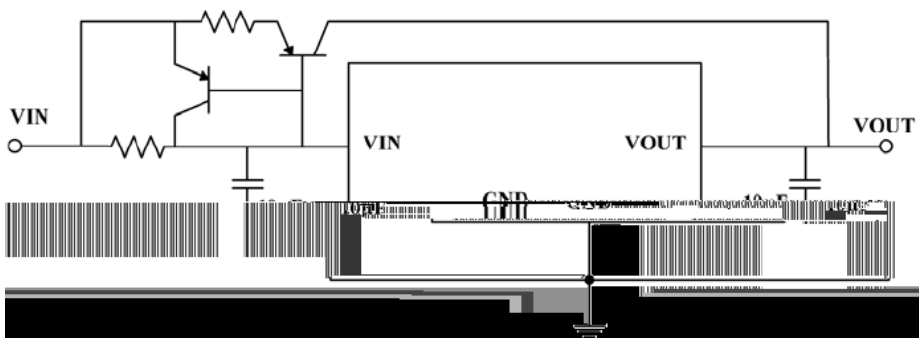


/ Typical Application Circuit


/ Circuit for Increasing Output Voltage

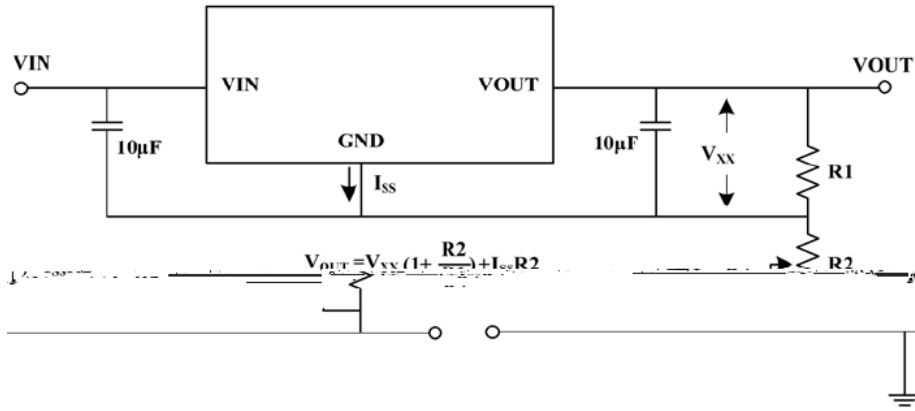

/ Constant Current Regulator

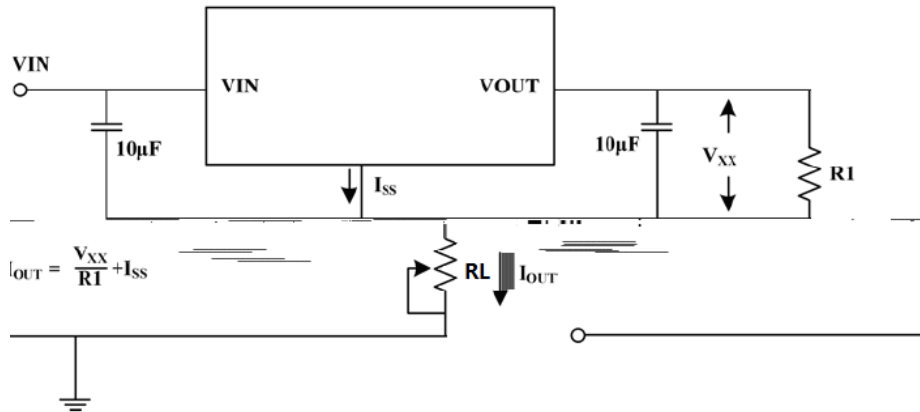


/ Double Output Circuit

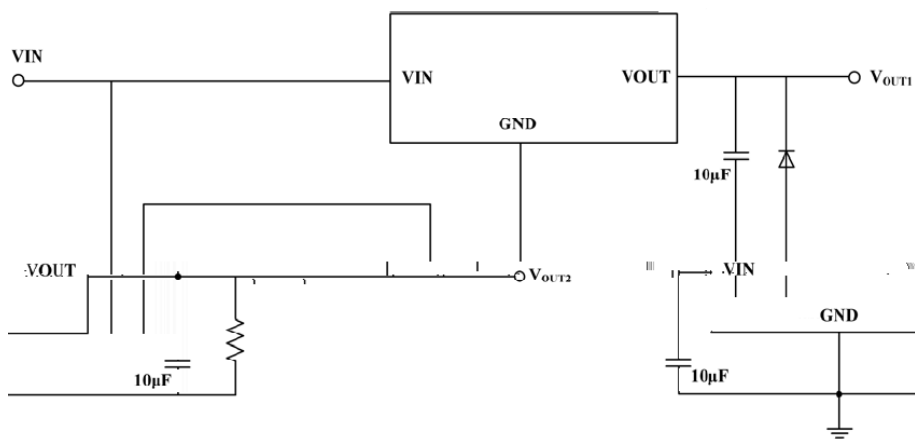


/ Package Dimensions

单位: mm

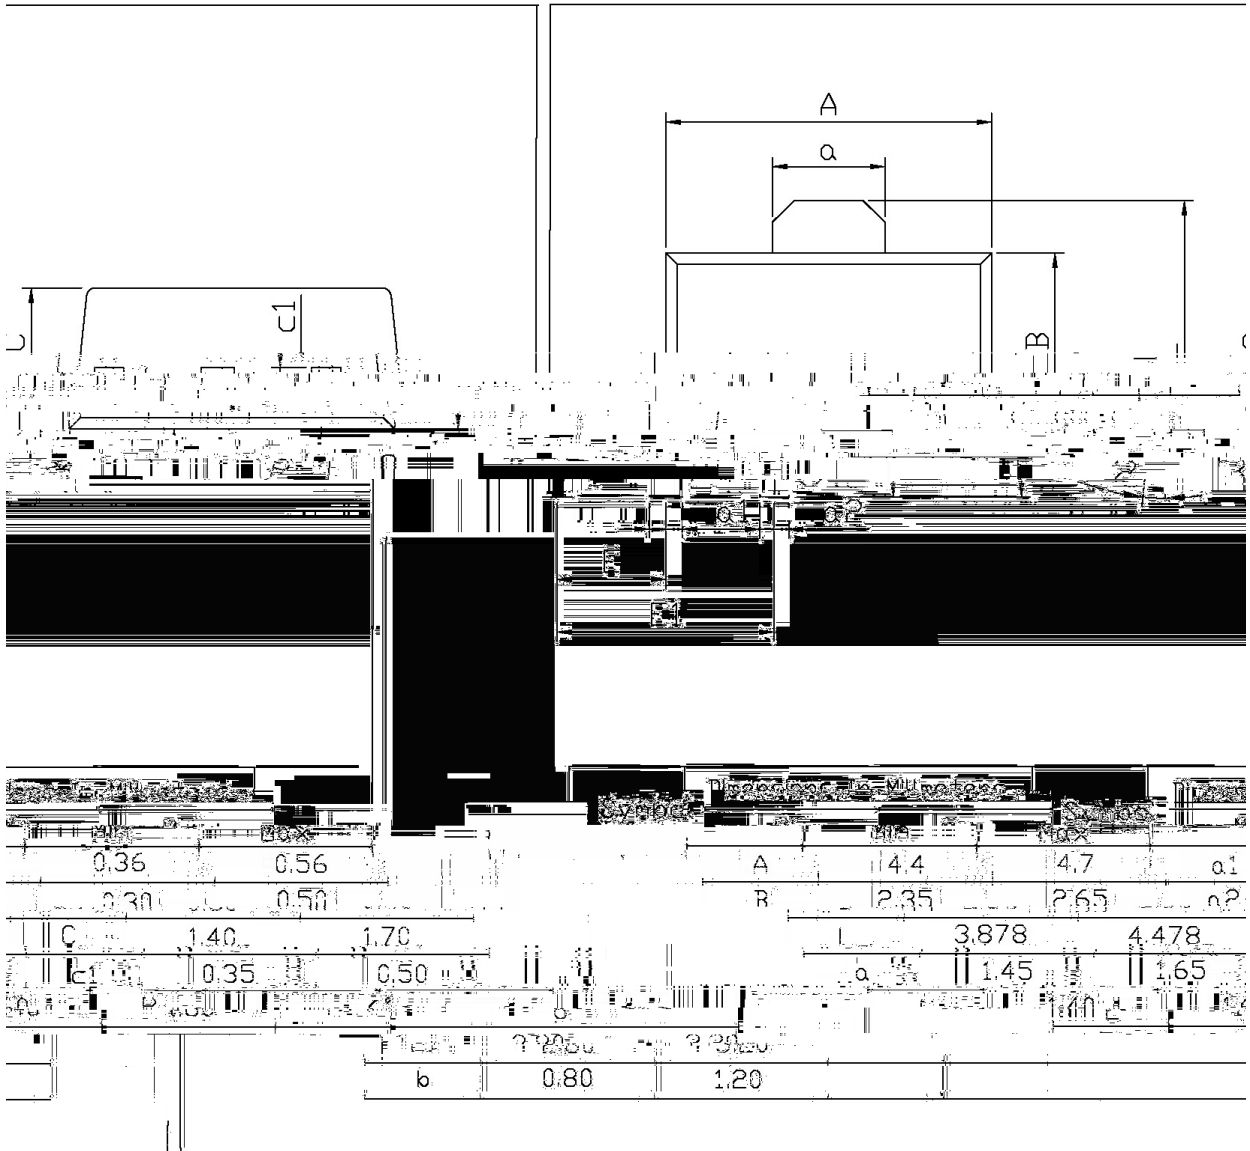

/ Marking Instructions

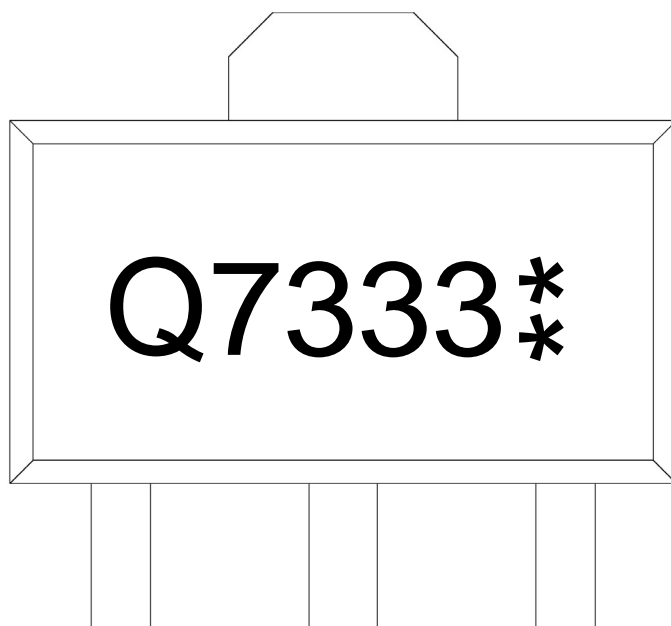

Q

7333

**


Note

Q: Automobile halogen-free product Code

7333: Product Type

** : Lot No. Code, code change with Lot No

() /

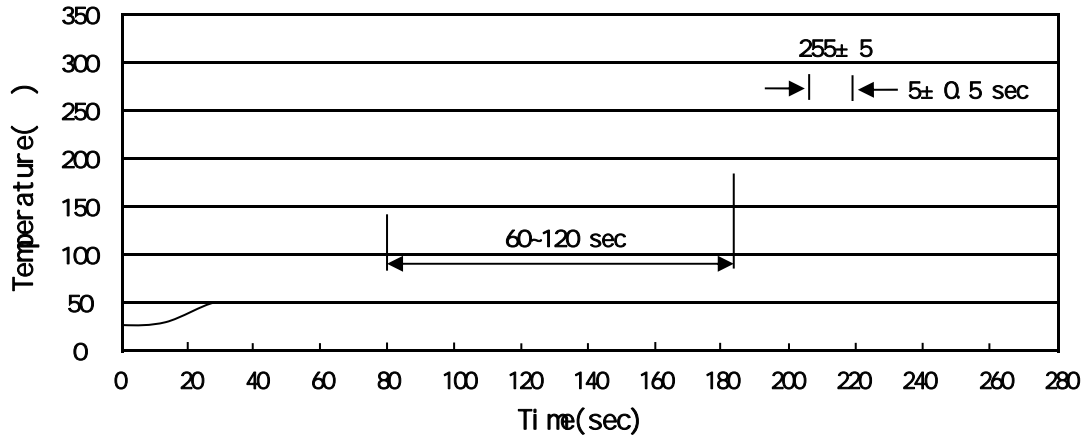

Note:

- 1 150 200 60 120sec; 1.Preheating:150~200 , Time:60~120sec.
- 2 255 5 5 0.5sec; 2.Peak Temp.:255 5 , Duration:5 0.5sec.
- 3 2 10 /sec. 3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260 5 10 1 sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	6	42,000	7 ×12	180×120×180	390×385×205

/ Notices